

DC-6GHz, 8 Way SMA Resistive Power Divider

Rev 1


Electrical & Environmental


Impedance	50 ohm
Number of Output Ports	8 Way
Frequency Range	DC-6 GHz
Insertion Loss	18 ± 1.5 dB (Including theoretical loss 18dB)
VSWR	≤ 1.2
Input Power	1 Watts max
Operating Temperature	-40°C ~ +85°C

Mechanical

Input/Output Connectors	SMA Female Body: Brass or stainless steel, Center contact: Gold plated BeCu
Housing Finishing	Aluminum alloy housing, with electric conductive oxidation
Weight	115g

Dimensions (Unit: mm/[inch], Tolerance: ± 0.3 mm)

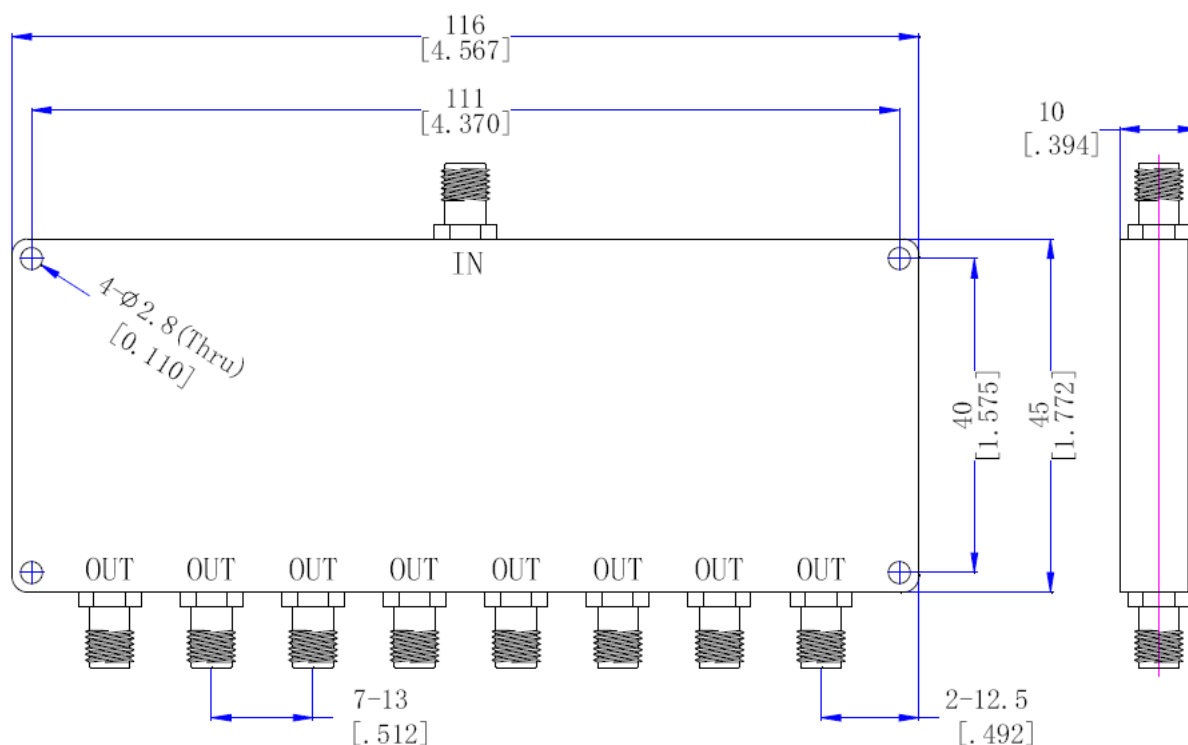



Typical Test Data

