


## Precision Phase Stable Test Cable Assembly, Using PL520P

DC-18 GHz, N Male to N Male

PL520P-NMNM-L(L:Length)

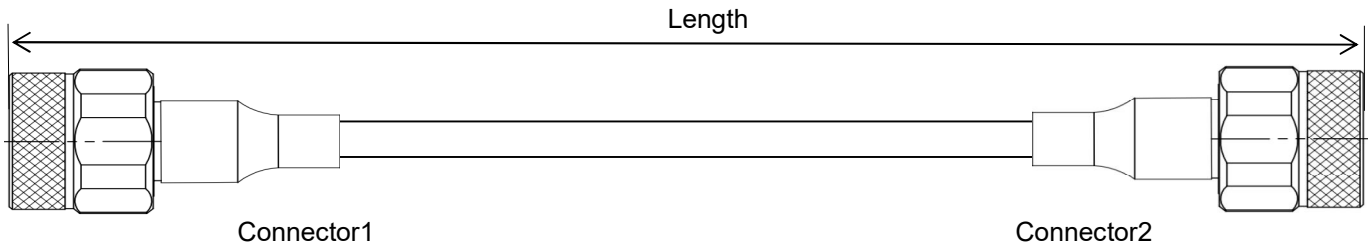


- Length can be in meter or in inch etc, e.g, PL520P-NMNM-1M. Standard length tolerance:  $\pm 1.5\%$ . Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

### Configuration

Connector 1	N male	Connector 2	N male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated brass	Center Contact	Gold plated brass
<b>Cable Type</b>	PL520P		

### Cable and Armor Construction



No.	Construction	Size (mm)	Materials
1	Center Conductor	1.45	Solid silver-plated copper
2	Dielectric	4.00	Low density PTFE
3	Outer Conductor	4.20	Silver-plated copper tape wrap
4	Interlayer	4.45	Low density PTFE
5	Outer Shield	4.90	Silver-plated copper wire braid
6	Inner Jacket	5.40	FEP



### Electrical

Frequency	DC-18 GHz
Impedance	50 $\Omega$
VSWR Max	1.25
IL Max(1 meter assembly)	1.5dB
*Mechanical Phase Stability	$< \pm 5^\circ$
Amplitude Stability vs Shaking	$< \pm 0.1\text{dB}$

### Mechanical & Environmental

Min.Bending Radius Static	26mm
Min. Bending Radius Repeated	52mm
Velocity of Propagation	82%
Temperature(Operation)	-50~85 °C
Temperature(Storage)	-60~85 °C

\* Wrap the cable 360 degree around a mandrel whose diameter is ten times of the cable jacket size.

## Bulk Cable Attenuation(Typical@25°C) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	12000	14000	18000	20000	26500
dB/100 Meter	12.5	23.0	32.7	46.6	57.4	66.6	74.8	82.3	89.3	101.9	107.8	125.2
Avg.Power kW	1.608	0.875	0.615	0.431	0.350	0.302	0.268	0.244	0.225	0.197	0.186	0.160

$$\text{Attenuation at any frequency} = [0.715686 \times \text{SQRT}(\text{FMHz})] + [0.000328 \times \text{FMHz}]$$

- Notes:**
- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as  $0.04\text{dB} \times \text{SQRT Freq}(\text{GHz})$ .
  - 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

## Typical Test Data (PL520P-NMNM-1M)

