

Low PIM Attenuator

RAL30200NA-C



400-6000MHz, 30dB, 200 Watts, 160dBC, N type Connector

Rev 3

Electrical

Impedance	50 ohm
Frequency Range	400-6000 MHz
Return Loss	≥ 18dB (Input Port), ≥ 16dB (Output Port)
Input Avg Power	200W
PIM (Intermod)	-160dBc min (with 2×20W tones at 850&2600MHz@25℃)
Direction	Unidirectional, N female input, N female output (other configurations available)
Attenuation(dB)	30
Accuracy(dB)	±1.6


Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Silver plated beryllium copper
Weight	About 3 kg

Environmental

Operating Temp	-40℃ to 75℃
RoHS	Compliant
Ingress Protection	IP40 (IP65 available upon request)

Dimensions(mm)

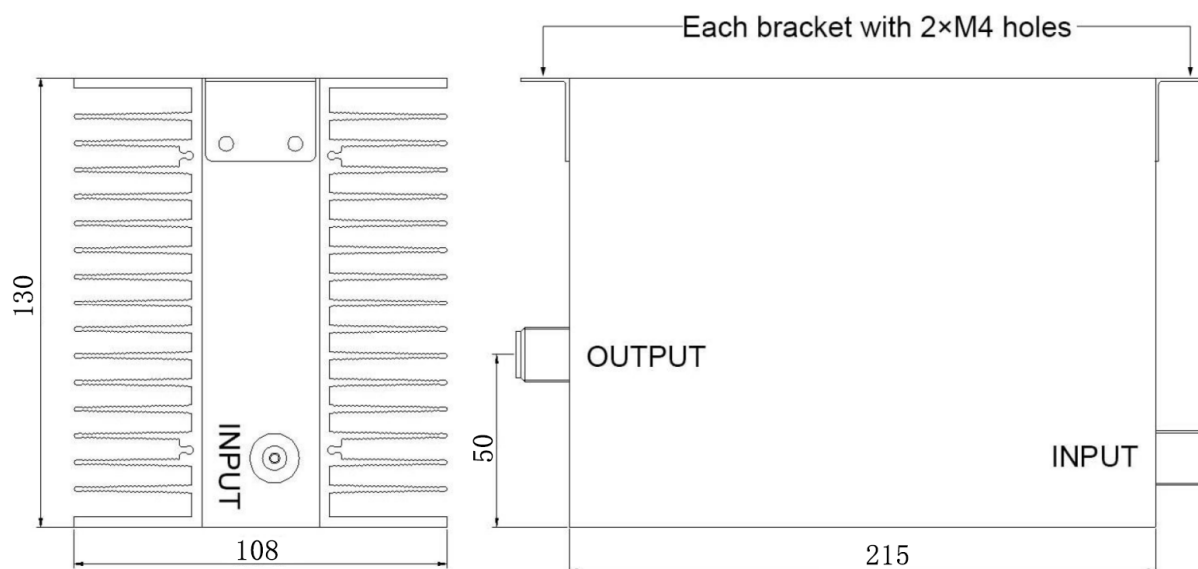

Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85℃.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RALXX200NA-C

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for input and male for output;
D=male for input and female for output.