



**SMA Male to SMA Male Adapter, DC-18 GHz, VSWR 1.15  
For Cryogenic Application**

Rev 1


**Electrical**

Impedance	50 ohm
Frequency Range	DC-18 GHz
VSWR	1.15 max

**Mechanical & Environmental**

Connector Body	Non-magnetic brass, Gold Plated Nickel-free under-plating
Center Contact	Non-magnetic beryllium copper, Gold Plated Nickel-free under-plating
Insulator	PTFE
Net Weight	Approx 5g
Operating Temperature	4 K to +125°C

**Dimensions(mm)**

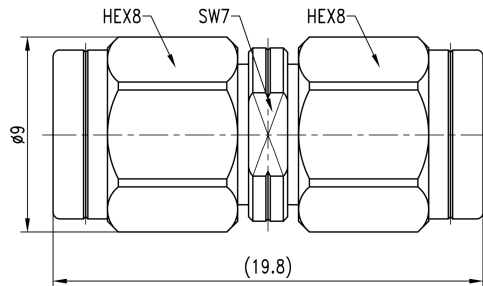



**SMA Male to SMA Male Adapter, DC-18 GHz, VSWR 1.15  
For Cryogenic Application**

Rev 1

**Typical Test Data**

