

**WR340 Waveguide Electromechanical Switch, DPDT, Latching, 24V, UDR26 Flange**

**Electrical**

Switch Type	DPDT*
Actuator Type	Latching
Frequency Range	2.17-3.3 GHz
VSWR	1.1 max
Insertion Loss	0.1 dB max
Isolation	70 dB min
Input Power (CW)	3000 W max
Actuating Voltage	24±2V DC
Actuating Current	1A



Generic photo used for illustration only

\*Adding an additional waveguide load for SPDT option.

**Mechanical & Environmental**


Switching Time	230 ms Typical
Operating Life	0.1 Million Cycles
Waveguide Size	WR340
Flange Type	UDR26
Waveguide and Flange	Aluminum, Conductive Oxidation
Motor Finish	Black Anodizing
Actuator Terminals	MS3112E10-6P
Operating Temperature	-40 °C~+85 °C
Storage Temperature	-55 °C~+100 °C
Humidity	100% with the cap**
Pressure	30 PSIG with the cap, including the driver
Ingress Protection Rating	IP65 with the cap

\*\*The weatherized cap is an integral part of the switch.

Remove the cap for access to manual override.

**WR340 Waveguide Electromechanical Switch, DPDT, Latching, 24V, UDR26 Flange**

**Drawing** (Dimensions are in mm)

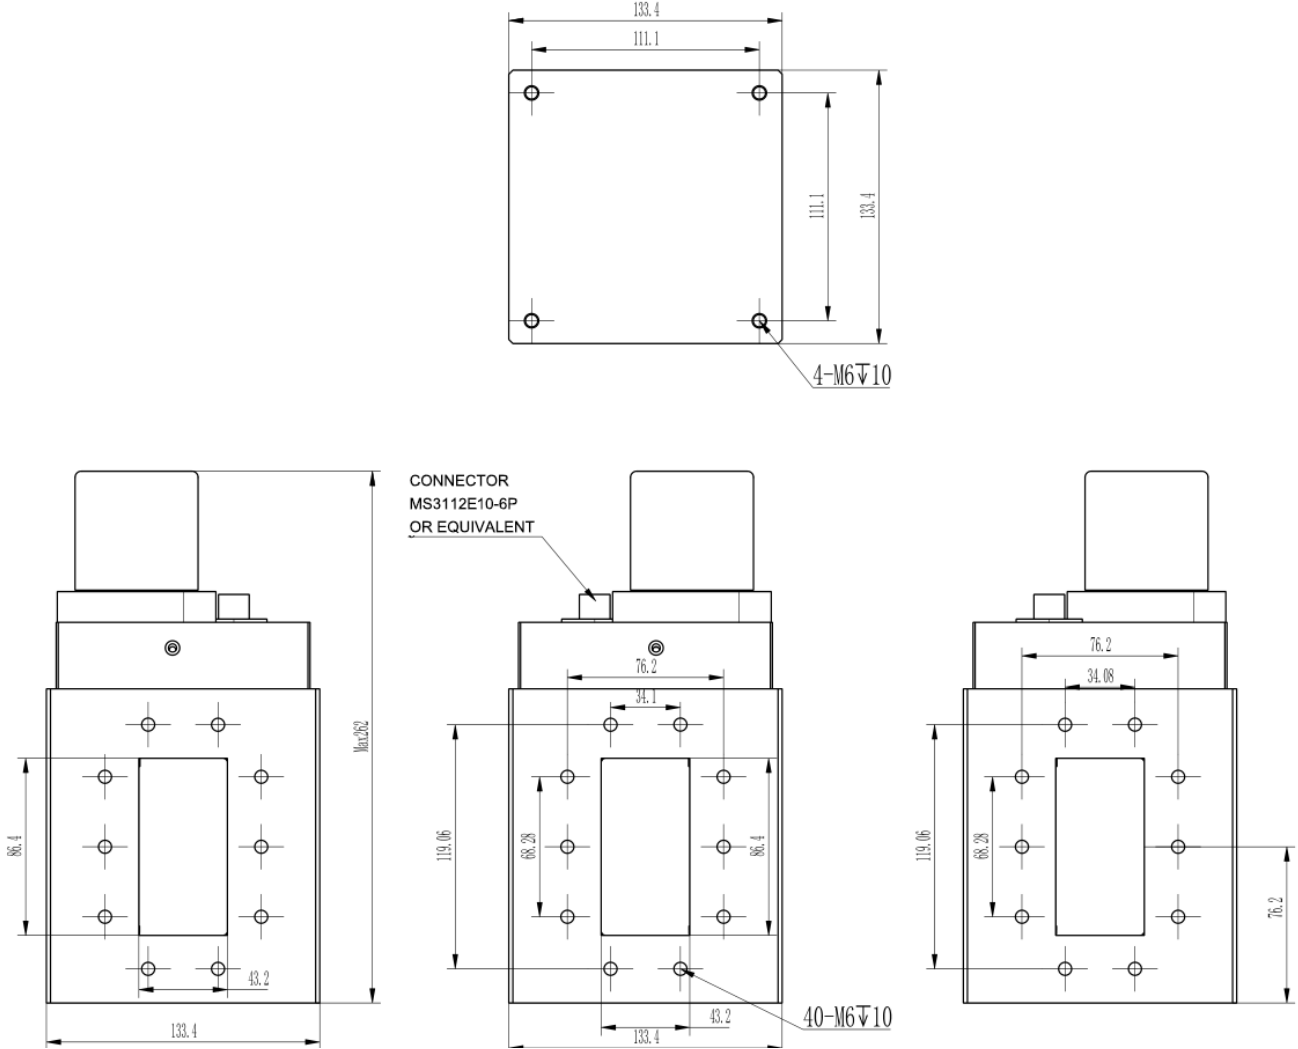

**Schematic**

