



Electrical

Impedance	50 ohm			
Frequency Range	DC-3 GHz			
VSWR	1.25 max			
Input Avg Power	1000W@ 25℃ ambient, derating linearly to 100W at 100℃			
Peak Power	10kW (5 micro-sec pulse width, 5% duty cycle)			
Direction	Unidirectional, N female input, N female output (other configurations available)			
Attenuation(dB)	20	30	40	50
Accuracy(dB)	±3.0	±2.5	±2.5	±2.5



Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 30kg

Environmental

Operating Temperature	-55℃ to 100℃
Storage Temperature	-55℃ to 125℃
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/℃

Dimensions(mm)

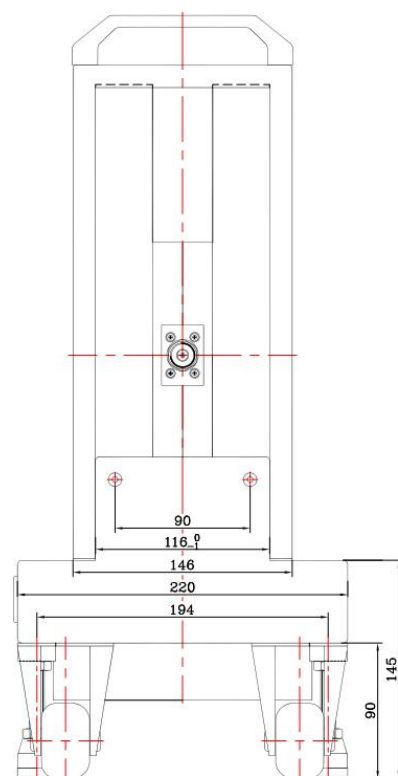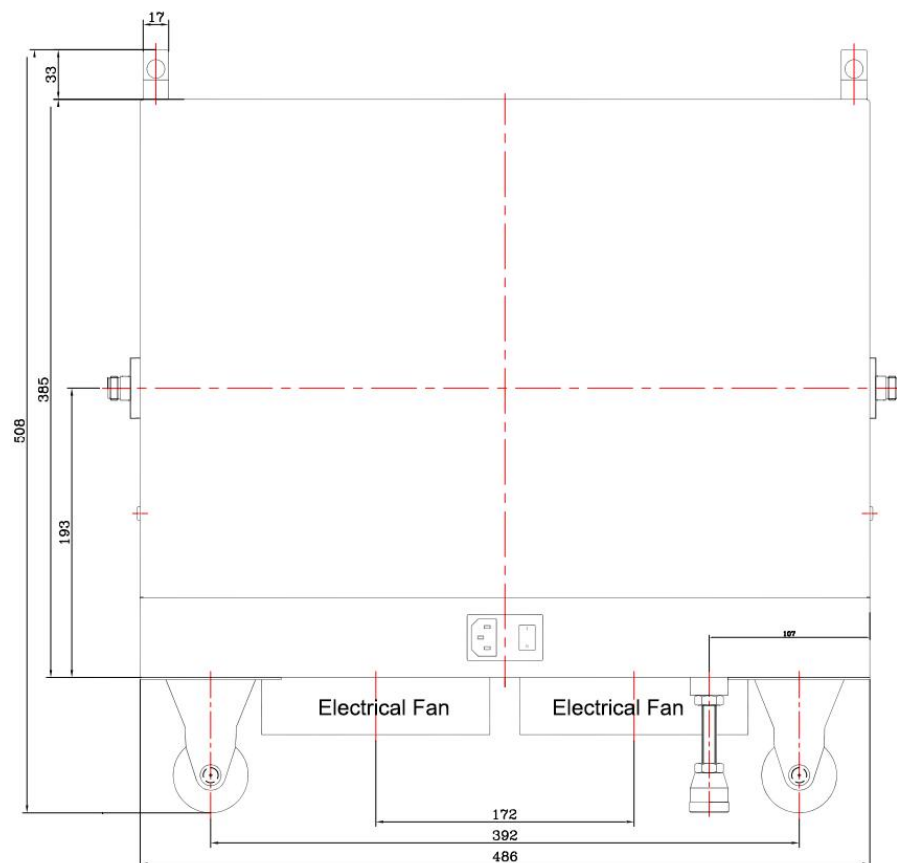

Coaxial Fixed Attenuator

RFH03XXNA1000

DC-3 GHz, 20-50 dB, 1000 Watts, N, Unidirectional, Fan-cooled



Rev 1

Model Description

[RFH03XXNA1000](#)

1.XX for dB value: 20=20dB, 30=30dB

2.Code for connector configuration:

A=female for two ends; B=male for two ends

C=female for input and male for output; D=male for input and female for output.

Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.
3. Always pay attention to the direction of attenuators.