

# Coaxial Fixed Attenuator

**RFH12XXND200-D**



**DC-12.4 GHz, 6-60 dB, 200 Watts, N, Unidirectional**

Rev 3

## Electrical

Impedance	50 ohm				
Frequency Range	DC-12.4 GHz				
VSWR	1.35 max				
Input Avg Power	200W@ 25°C ambient, derating linearly to 20W at 100°C				
Peak Power	5kW (5 micro-sec pulse width, 2% duty cycle)				
Direction	Unidirectional, N male input, N female output (other configurations available)				
Attenuation(dB)	6-10	20	30	40	50,60
Accuracy(dB)	±0.9	±0.9	±1.0	±1.1	±1.1


## Mechanical

Connector Body	Ternary alloy plated brass
Heat Sink	Black anodized aluminum
Center Contact	Gold plated beryllium copper/brass
Net Weight	About 3000 g

## Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

## Dimensions(mm)

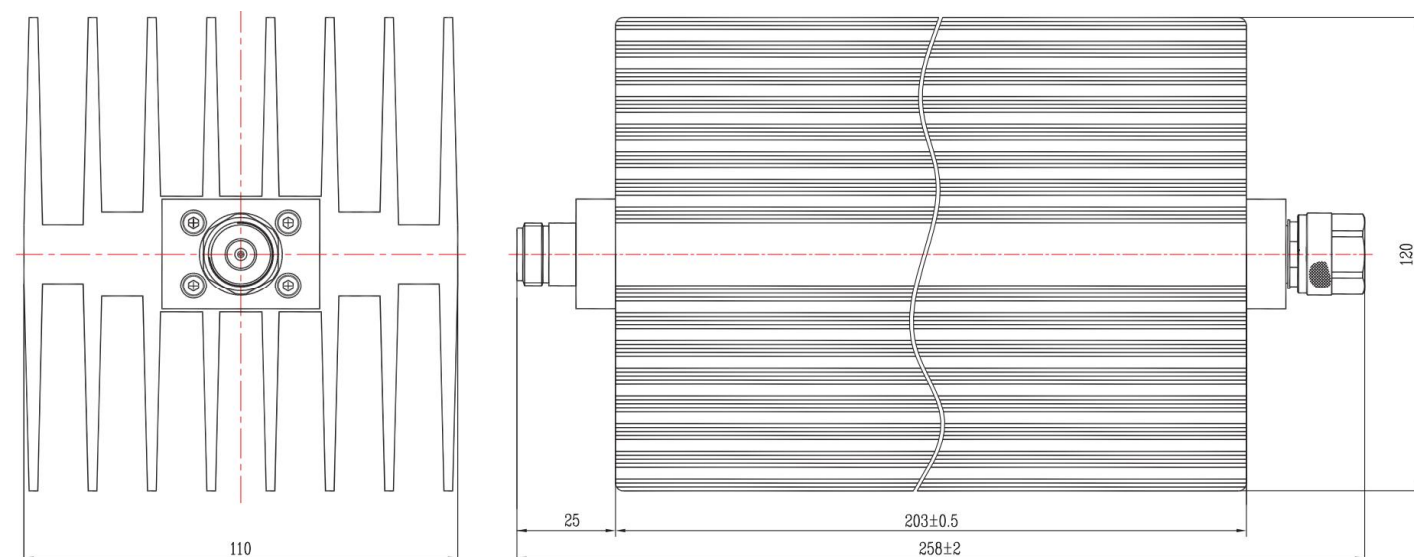

## Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

## Model Description

### RFH12XXND200-D

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:  
A=female for two ends; B=male for two ends  
C=female for input and male for output;  
D=male for input and female for output.