

Coaxial Fixed Attenuator

RFH50XX24D35

DC-50 GHz, 10-40 dB, 35 Watts, 2.4mm, Unidirectional



Rev 3

Electrical

Impedance	50 ohm			
Frequency Range	DC-50 GHz			
VSWR	1.44 max			
Input Avg Power	35W@ 25°C ambient, derating linearly to 3.5W at 100°C			
Peak Power	100W (5 micro-sec pulse width, 10% duty cycle)			
Direction	Unidirectional, 2.4mm male input, 2.4mm female output (other configurations available)			
Attenuation(dB)	10	20	30	40
Accuracy(dB)	-2.5/+3.2	-2.0/+2.5	-2.0/+2.2	-2.0/+2.2


Mechanical

Connector Body	Passivated stainless steel
Heat Sink	Black anodized aluminum
Center Contact	1.27um Gold plated BeCu
Net Weight	Approx 160 g

Environmental

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 125°C
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/°C

Dimensions(mm)

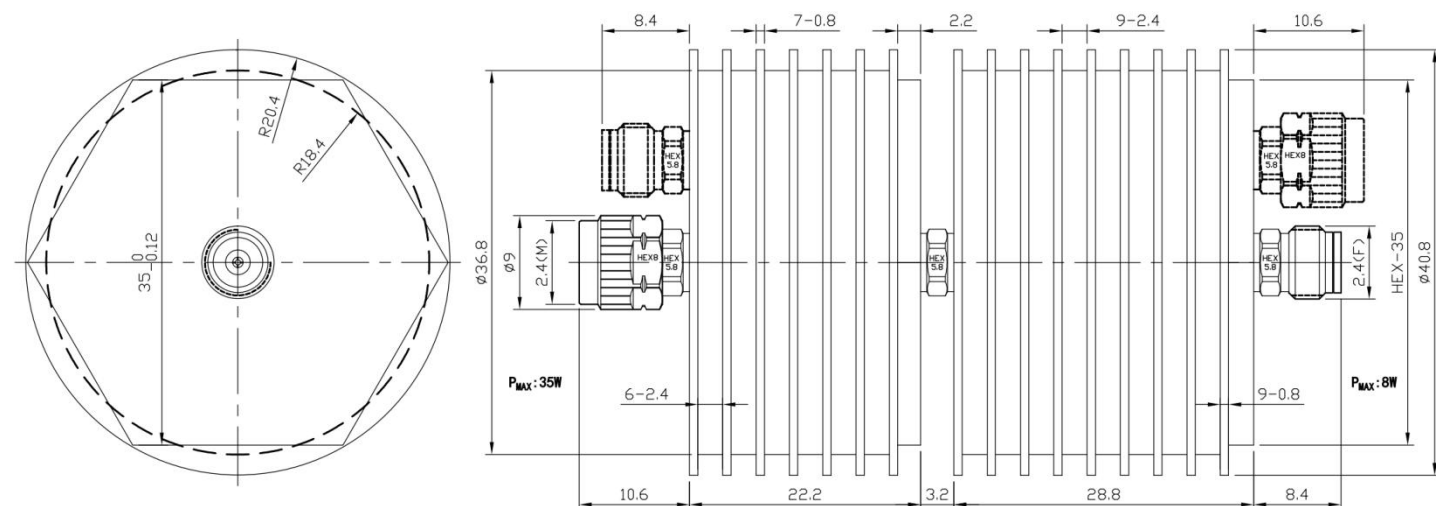

Notes

- 1.Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFH50XX24D35

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for input and male for output;
D=male for input and female for output.

Typical Test Data(Contact us at sales@rfone.cn for test plots of more models)

