



Rev 1

## Electrical



<b>Impedance</b>	50 ohm
<b>Frequency Range</b>	DC-3 GHz
<b>VSWR</b>	1.3 max
<b>Input Avg Power</b>	1500W@ 25°C ambient, derating linearly to 150W at 100°C
<b>Peak Power</b>	10kW (5 micro-sec pulse width, 5% duty cycle)

## Mechanical

Connector Body	Brass		Operating Temp	-55℃ to 100℃
Center Contact	Gold plated brass		Storage Temp	-55℃ to 125℃
Heat Sink	Black anodized aluminum		RoHS	Compliant
Weight	About 38kg			

## Environmental

**Dimensions(mm)**

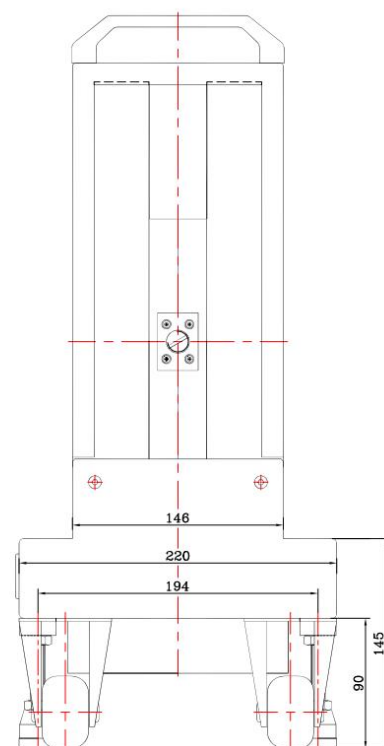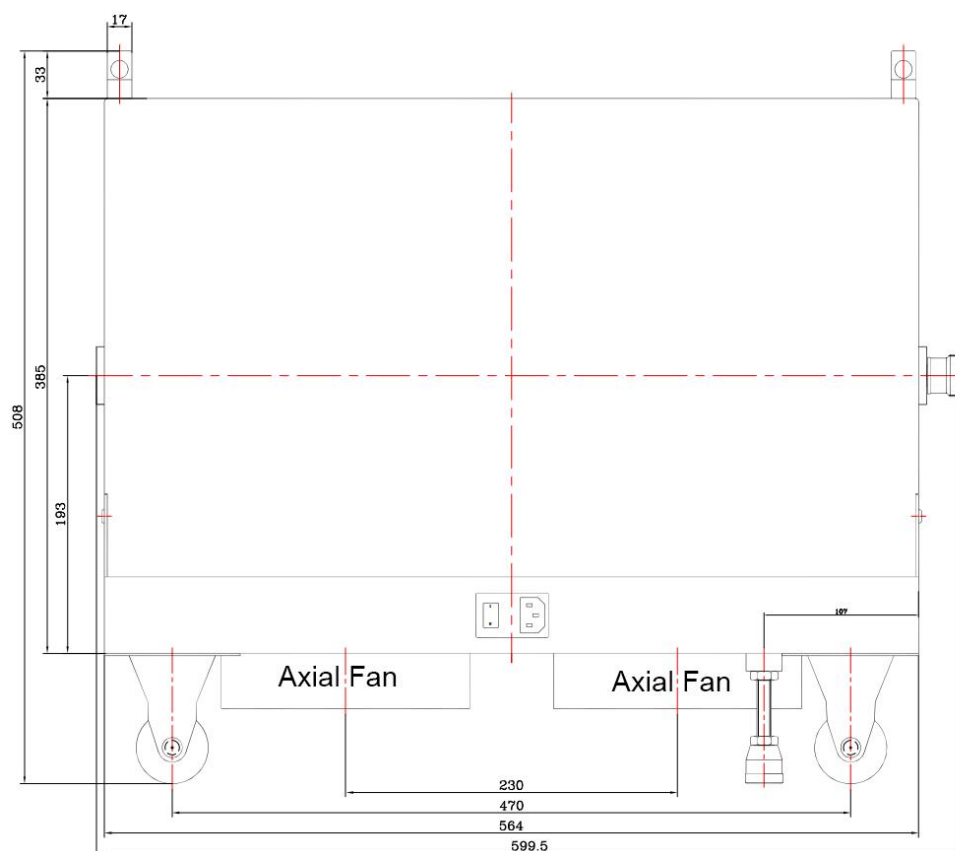

## Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.