



#### Electrical


Impedance	50 ohm
Frequency Range	DC-3 GHz
VSWR	1.3 max
Input Avg Power	1500W@ 25°C ambient, derating linearly to 150W at 100°C
Peak Power	10kW (5 micro-sec pulse width, 5% duty cycle)

#### Mechanical

Connector Body	Brass		Operating Temp	-55℃ to 100℃
Center Contact	Gold plated brass		Storage Temp	-55℃ to 125℃
Heat Sink	Black anodized aluminum		RoHS	Compliant
Weight	About 38kg			

#### Environmental

#### Dimensions(mm)

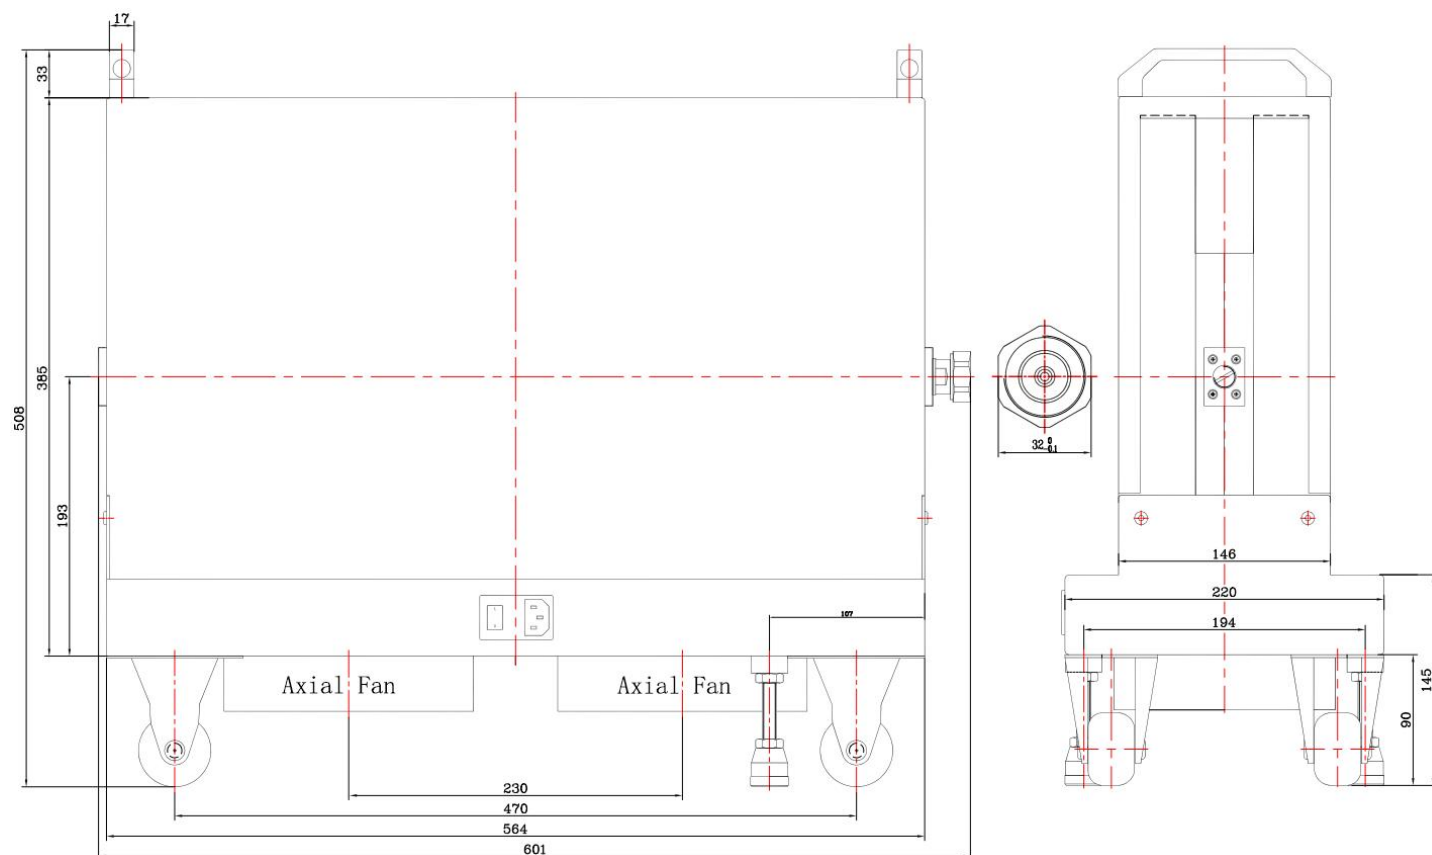

#### Notes

- 1.Supplied with power cord for fans, additional transformer and plug adapter available upon request.
- 2.Always switch on the electrical fan once the product is in operation.