



Electrical

| | |
|------------------------|---|
| Impedance | 50 ohm |
| Frequency Range | DC-4 GHz |
| VSWR | 1.25 max |
| Input Avg Power | 1000W@ 25°C ambient, derating linearly to 100W at 100°C |
| Peak Power | 5kW (5 micro-sec pulse width, 10% duty cycle) |


Mechanical

| | |
|-----------------------|----------------------------|
| Connector Body | Ternary alloy plated brass |
| Center Contact | Gold plated BeCu |
| Heat Sink | Black anodized aluminum |
| Weight | Approx 30kg |

Environmental

| | |
|-----------------------|----------------|
| Operating Temp | -55°C to 100°C |
| Storage Temp | -55°C to 125°C |
| RoHS | Compliant |

Dimensions(mm)

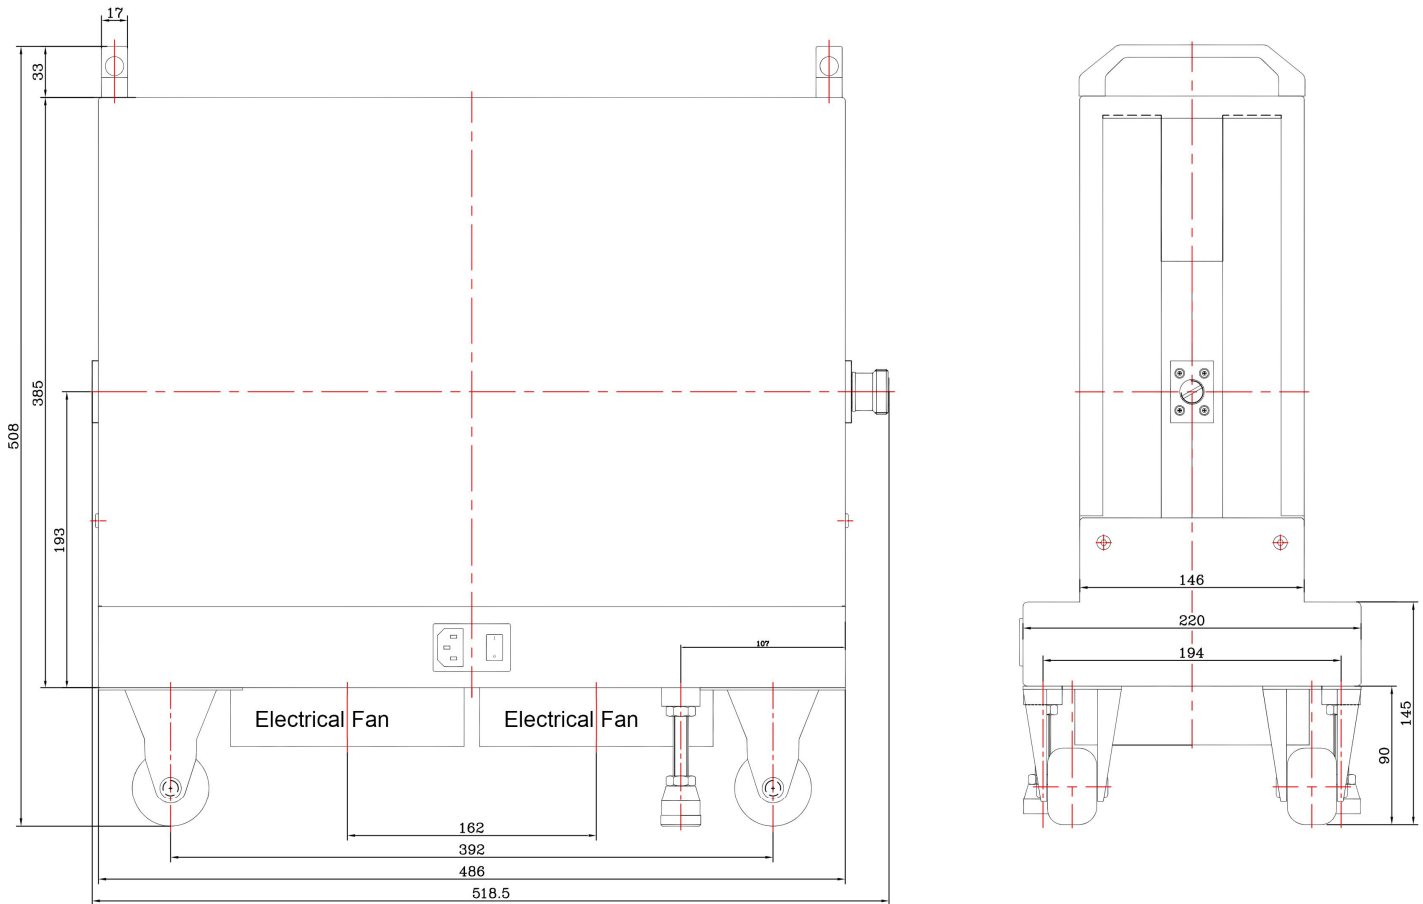

Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.