



Electrical


| | |
|-----------------|---|
| Impedance | 50 ohm |
| Frequency Range | DC-4 GHz |
| VSWR | 1.35 max |
| Input Avg Power | 1500W@ 25°C ambient, derating linearly to 150W at 100°C |
| Peak Power | 10kW (5 micro-sec pulse width, 5% duty cycle) |

Mechanical

| | | | | |
|----------------|-------------------------|--|----------------|--------------|
| Connector Body | Brass | | Operating Temp | -55℃ to 100℃ |
| Center Contact | Gold plated brass | | Storage Temp | -55℃ to 125℃ |
| Heat Sink | Black anodized aluminum | | RoHS | Compliant |
| Weight | About 38kg | | | |

Environmental

Dimensions(mm)

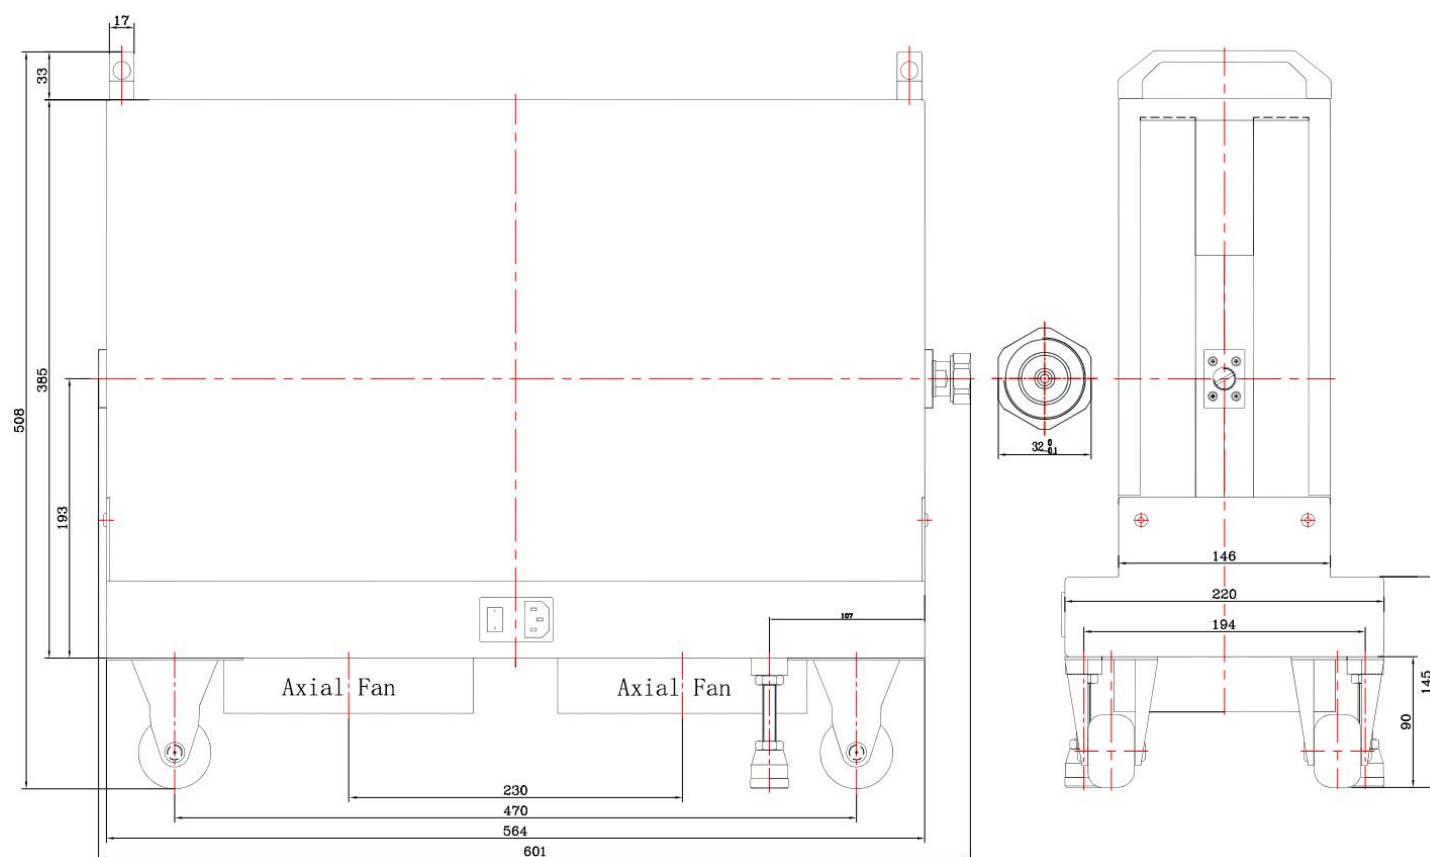

Notes

- 1.Supplied with power cord for fans, additional transformer and plug adapter available upon request.
- 2.Always switch on the electrical fan once the product is in operation.