



Electrical

| | |
|------------------------|--|
| Impedance | 50 ohm |
| Frequency Range | DC-6 GHz |
| VSWR | 1.2 max |
| Input Avg Power | 5W@ 25°C ambient, derating linearly to 0.5W at 100°C |
| Peak Power | 500W (5 micro-sec pulse width, 0.5% duty cycle) |


Mechanical

| | |
|-----------------------|----------------------------|
| Connector Body | Ternary alloy plated brass |
| Center Contact | Gold plated brass |
| Heat Sink | N/A |

Environmental

| | |
|-----------------------|----------------|
| Operating Temp | -55°C to 100°C |
| Storage Temp | -55°C to 125°C |
| RoHS | Compliant |

Dimensions(mm)

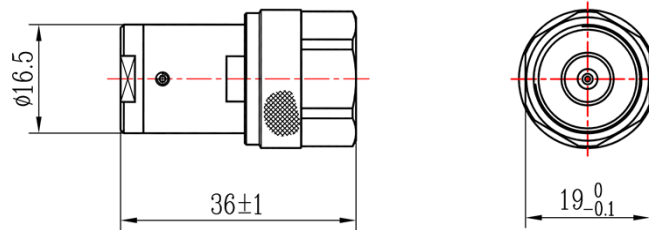

Notes

1. Customized outlines and optimal VSWR available.