



#### Electrical

Impedance	50 ohm
Frequency Range	DC-6 GHz
VSWR	1.4 max
Input Avg Power	2000W@ 25°C ambient, derating linearly to 150W at 100°C
Peak Power	10kW (5 micro-sec pulse width, 5% duty cycle)


#### Mechanical

Connector Body	Brass
Center Contact	Gold plated brass
Heat Sink	Black anodized aluminum
Weight	About 39kg

#### Environmental

Operating Temp	-55°C to 100°C
Storage Temp	-55°C to 125°C
RoHS	Compliant

#### Dimensions(mm)

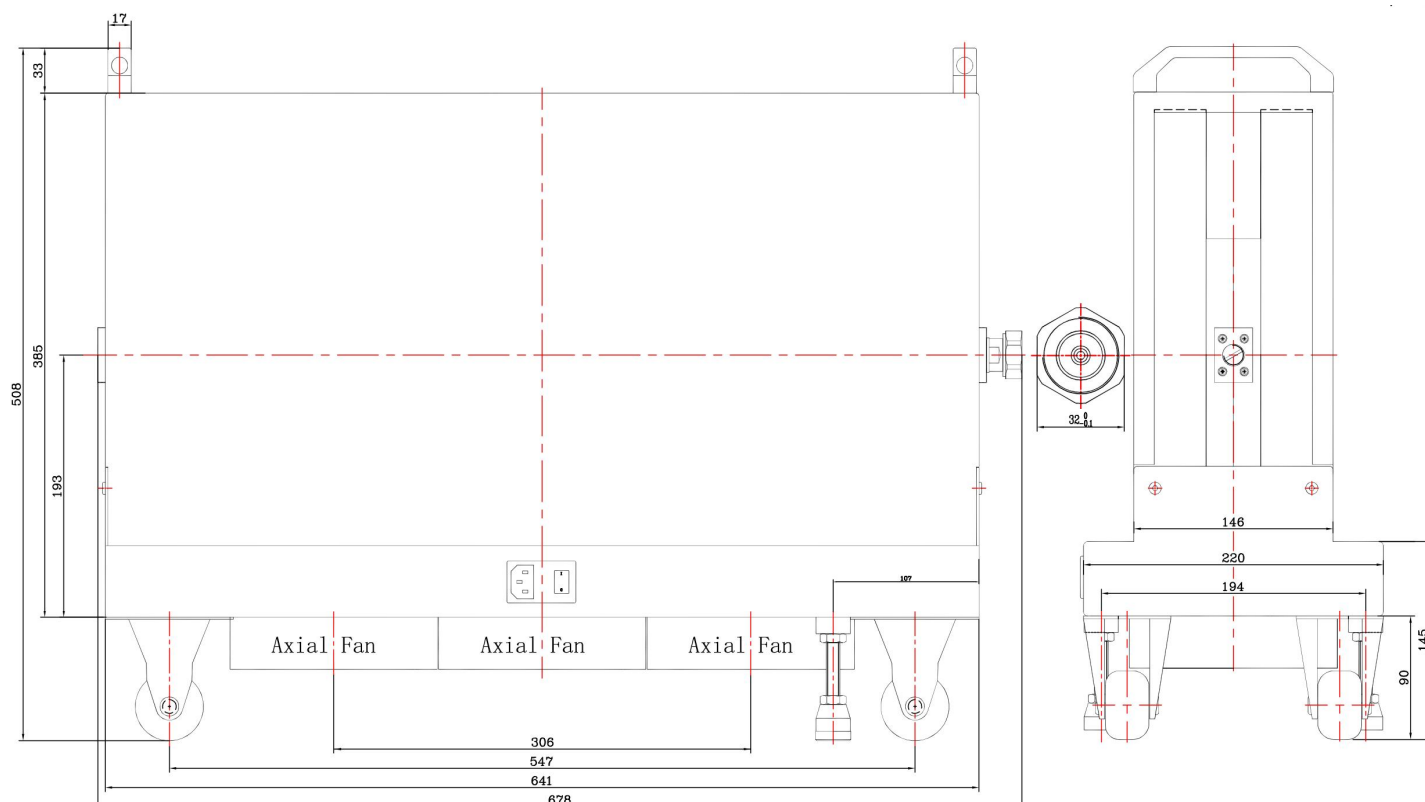

#### Notes

1. Supplied with power cord for fans, additional transformer and plug adapter available upon request.
2. Always switch on the electrical fan once the product is in operation.