



**20 dBi Gain, 5.38-8.17 GHz, WR137 Standard Gain Horn with SMA Female Port**

Rev 1


**Electrical**

Frequency Range	5.38-8.17 GHz
Norminal Gain	20 dBi
Polarization	Linear
VSWR	1.3 max
Operating Temperature	-40°C~+70°C

**Mechanical**

Waveguide Size	WR137
Flange Type	UDR70 Rectangular Cover Flange
Body Material and Finish	Aluminum, Painted
RF Connector	SMA Female
Net Weight	Approx 1150g

**Dimensions(mm)**

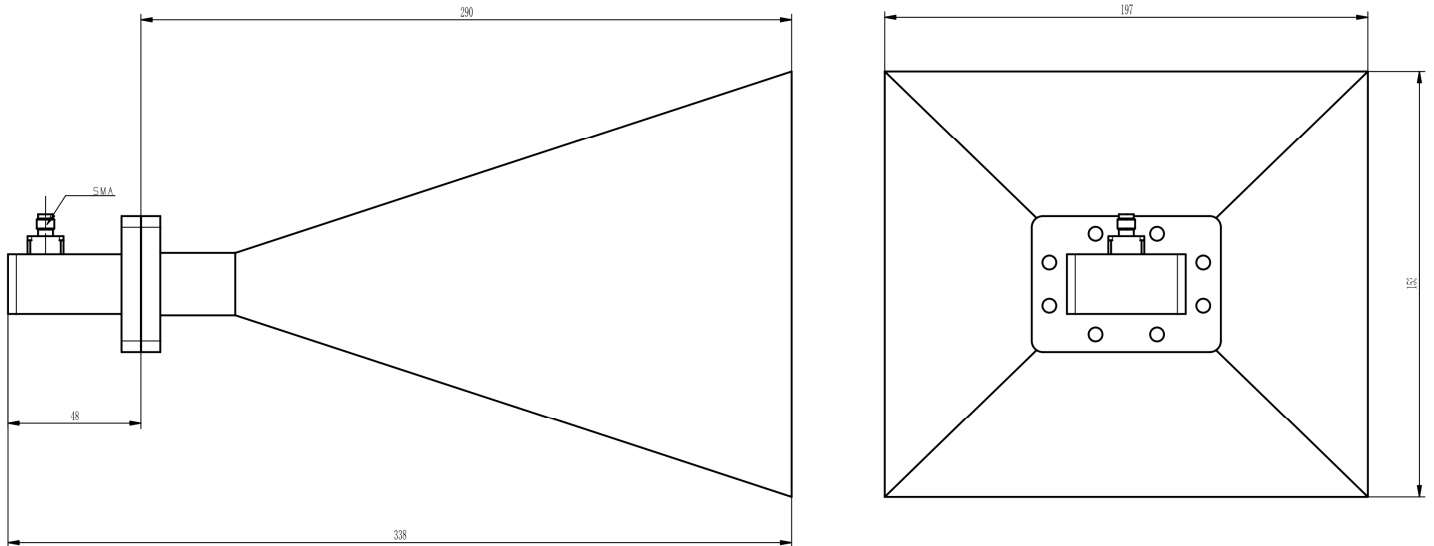

20 dBi Gain, 5.38-8.17 GHz, WR137 Standard Gain Horn with SMA Female Port



Rev 1

## Typical Test Data

