



20 dBi Gain, 3.22-4.9 GHz, WR229 Standard Gain Horn with SMA Female Port

Rev 1


Electrical

| | |
|-----------------------|--------------|
| Frequency Range | 3.22-4.9 GHz |
| Norminal Gain | 20 dBi |
| Polarization | Linear |
| VSWR | 1.3 max |
| Operating Temperature | -40°C~+70°C |

Mechanical

| | |
|--------------------------|--------------------------------|
| Waveguide Size | WR229 |
| Flange Type | UDR40 Rectangular Cover Flange |
| Body Material and Finish | Aluminum, Painted |
| RF Connector | SMA Female |
| Net Weight | Approx 2.5kg |

Dimensions(mm)

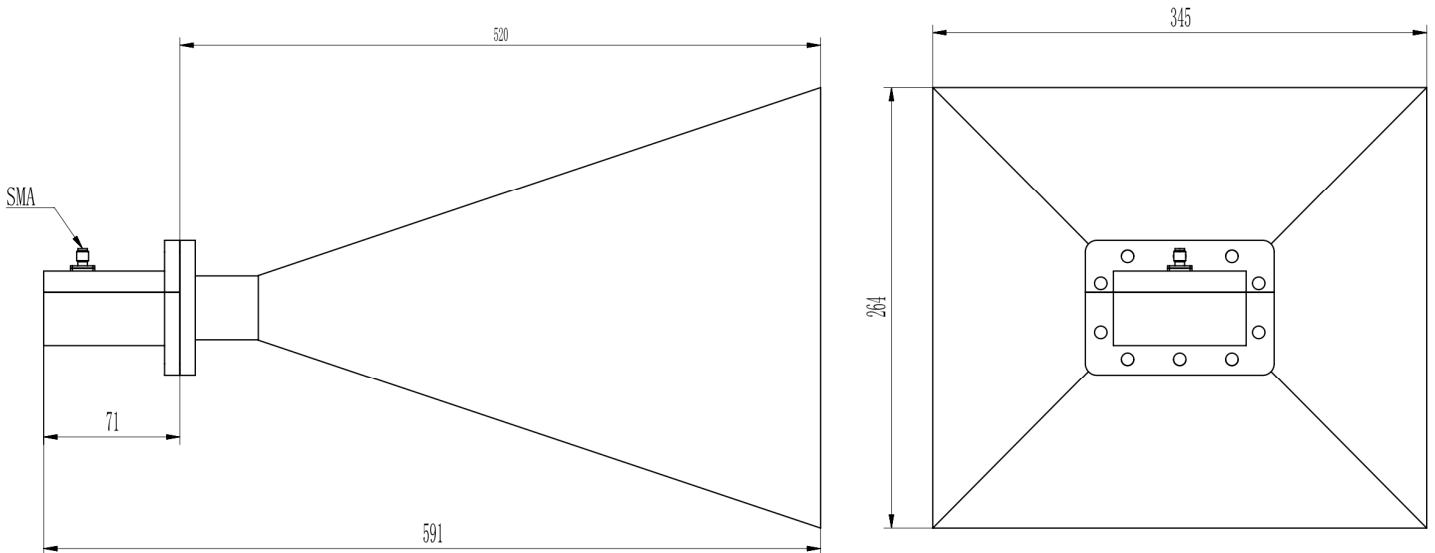



20 dBi Gain, 3.22-4.9 GHz, WR229 Standard Gain Horn with SMA Female Port

Rev 1

Typical Test Data

