



**15 dBi Gain, 26.3-40 GHz, WR28 Standard Gain Horn with UBR320 Flange**

Rev 1




**Electrical**

Frequency Range	26.3-40 GHz
Norminal Gain	15 dBi
Polarization	Linear
VSWR	1.2 max
Operating Temperature	-40°C~+70°C

**Mechanical**

Waveguide Size	WR28
Flange Type	UBR320 Square Cover Flange
Body Material and Finish	Copper, Painted

**Dimensions(mm)**

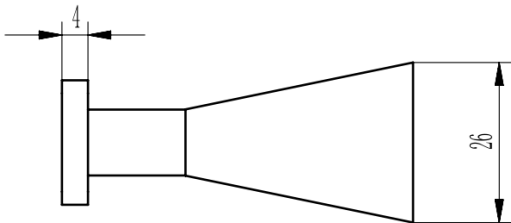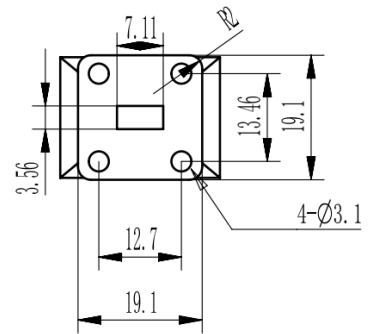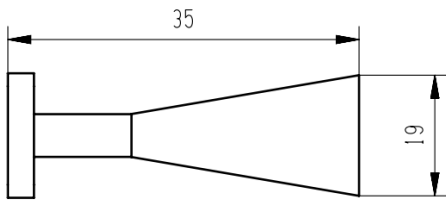



**15 dBi Gain, 26.3-40 GHz, WR28 Standard Gain Horn with UBR320 Flange**

Rev 1

**Typical Test Data**

