



**10 dBi Gain, 1.72-2.61 GHz, WR430 Standard Gain Horn with UDR22 Flange**

Rev 1


**Electrical**

Frequency Range	1.72-2.61 GHz
Norminal Gain	10 dBi
Polarization	Linear
VSWR	1.2 max
Operating Temperature	-40°C~+70°C

**Mechanical**

Waveguide Size	WR430
Flange Type	UDR22 Rectangular Cover Flange
Body Material and Finish	Aluminum, Painted
Net Weight	Approx 1.55kg

**Dimensions(mm)**

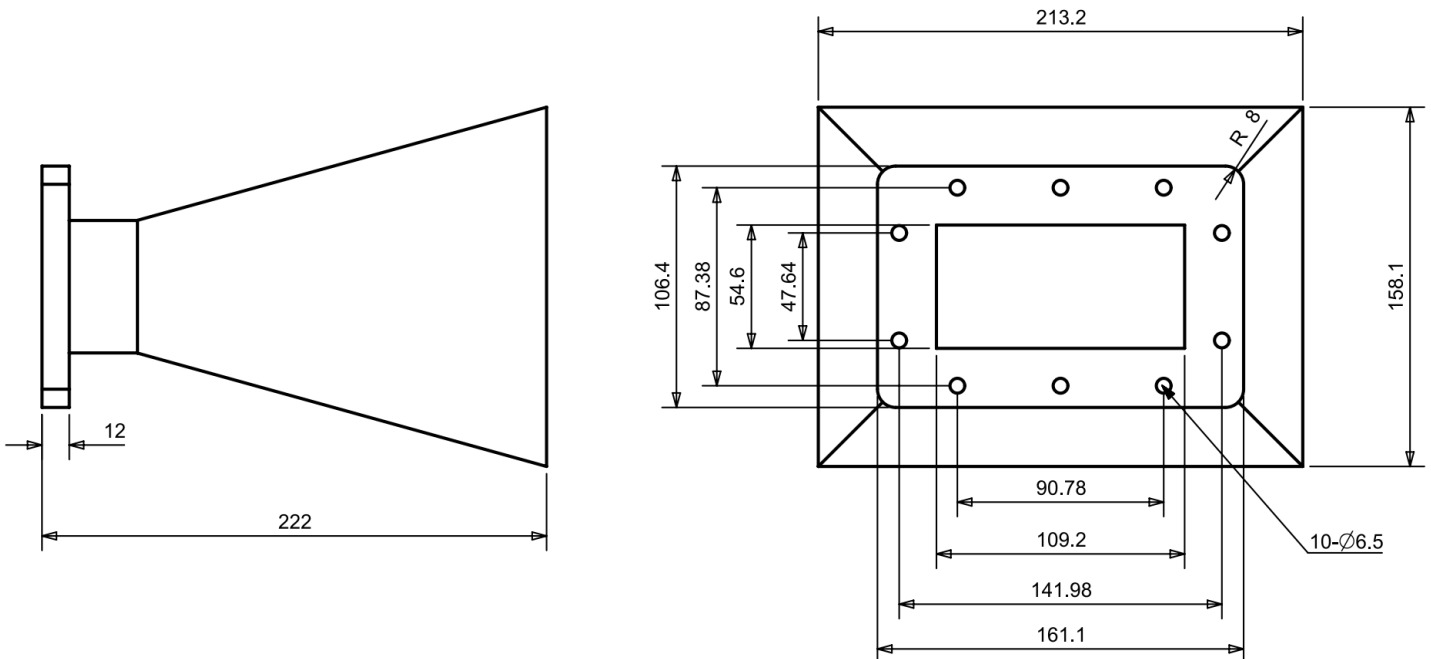

# Typical VSWR

