




Electrical & Environmental

Impedance	50 ohm
Frequency Range	DC-6000 MHz
Return Loss	18 dB min
Input Avg Power	100W@ 25°C
Peak Power	1000W (5µsec pulse width, 0.5% duty cycle)
PIM (Intermod)	-160dBc min (with 2×20W tones@25°C)
Ingress Protection	IP40, indoor use
Operating Temp	-40°C-+75°C

Mechanical

Connector	DIN 7/16 female
Connector Body	Brass, ternary alloy plated
Center Contact	Silver plated BeCu
Housing	Aluminum, anodized black

Dimensions(mm)

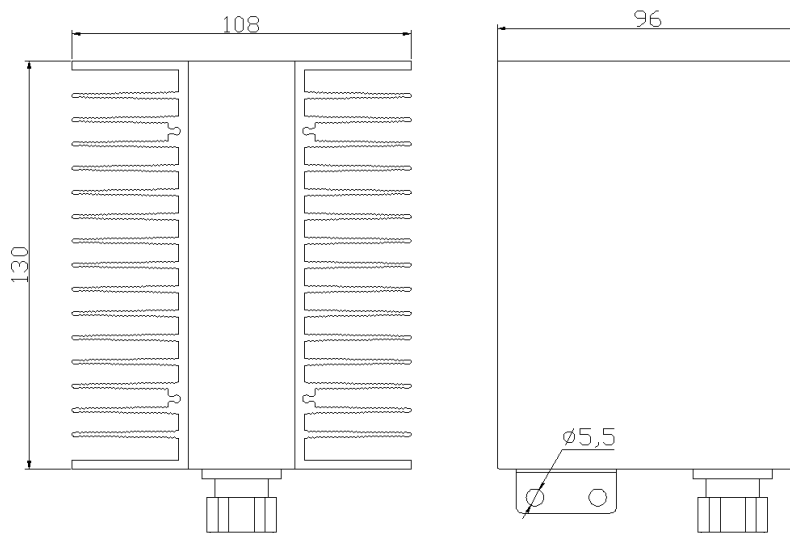

100W PIM Load