


047" High Density Flexible Cable Assembly, Using SP160

DC-18 GHz, Direct Solder SMA Male to SMP Female **SP160-DSMAMSMPF-L(L:Length)**

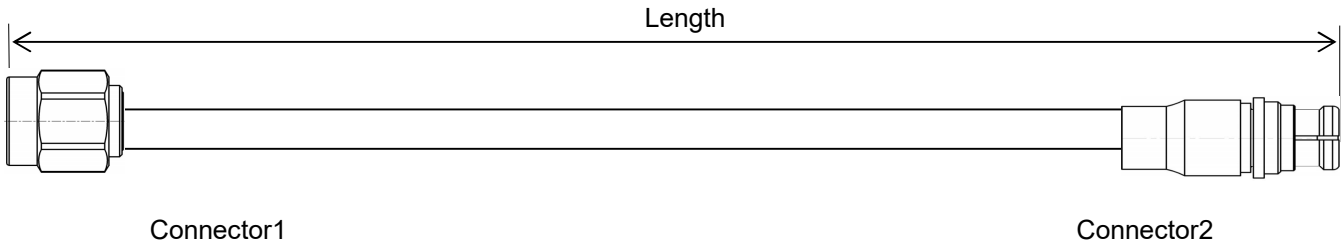


- Length can be in meter or in inch etc, e.g, PL220-SMPFSMPFRA-L. Standard length tolerance: $\pm 1.5\%$ or $\pm 5\text{mm}$ whichever is greater. Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

Configuration

Connector 1	Direct solder SMA male	Connector 2	SMP female
Body	Gold plated brass	Body	Gold plated BeCu
Nut	Passivated stainless steel	Center Contact	Gold plated BeCu
Center Contact	Gold plated brass	Cable Type	SP160

Cable Construction

			
	↑ 1	↑ 2	↑ 3
	↑ 4	↑ 5	
No.	Construction	Size (mm)	Materials
1	Center Conductor	0.29	Silver plated copper
2	Dielectric	0.94	Solid PTFE
3	Outer Conductor	1.10	Silver plated copper tape wrap
4	Outer Shield	1.29	Silver plated copper wire braid
5	Jacket	1.60	FEP



Electrical

Frequency	DC-18 GHz
Impedance	50 Ω
*VSWR Max	1.3-1.35
*IL Max(0.1 meter assembly)	1.12dB

Mechanical & Environmental

Min.Bending Radius Static	6mm
Min. Bending Radius Repeated	16mm
Temperature(Operation)	-50~105 °C
Temperature(Storage)	-60~105 °C

* The VSWR and IL include the loss and reflection contributions from the SMP adapters used during testing.



047" High Density Flexible Cable Assembly, Using SP160

DC-18 GHz, Direct Solder SMA Male to SMP Female **SP160-DSMAMSMPF-L(L:Length)**

Attenuation(Typical@25°C&VSWR=1.0) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	12000	18000	26500	40000	50000	67000
dB/100 Meter	64.7	119.7	171.3	246.5	305.8	357.0	402.9	445.1	557.0	692.5	877.4	999.8	1190
Avg.Power kW	0.069	0.037	0.026	0.018	0.015	0.012	0.011	0.010	0.009	0.008	0.006	0.005	0.004
Attenuation at any frequency= $[3.6710461 \times \text{SQRT}(\text{FMHz})] + [0.0035795 \times \text{FMHz}]$													

Notes:

- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as 0.04dB x SQRT Freq(GHz).
- 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.