


Armored Thermal Vacuum Phase Stable Cable Assembly, Using TVAC380

DC-26.5 GHz, SMA Male to SMA Male

TVAC380-SMAMSMAM-L-A(L:Length)

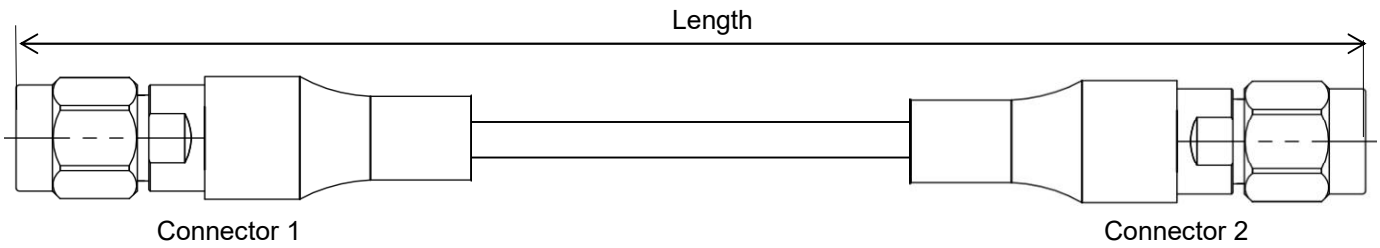


- Length can be in meter or in inch etc, e.g, TVAC380-SMAMSMAM-1M. Standard length tolerance $\pm 1.5\%$ or $\pm 5\text{mm}$ whatever is greater.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

Configuration

Connector 1	Vented SMA male	Connector 2	Vented SMA male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated brass	Center Contact	Gold plated brass
Cable Type	TVAC380	Armor	TVAC-AL620

Cable and Armor Construction



No.	Construction	Size (mm)	Materials
1	Center Conductor	1.02	Solid silver-plated copper
2	Dielectric	2.80	Low density PTFE
3	Outer Conductor	3.00	Silver-plated copper tape wrap
4	Interlayer	3.24	Low density PTFE
5	Outer Shield	3.50	Silver-plated copper wire braid
6	Jacket	3.80	FEP
7	Crush Resistance Layer	4.80	Stainless steel spiral
8	Strengthening Layer	5.35	Silver plated copper braid
9	Waterproof Layer	5.40	PTFE Binder
10	Armor Jacket	6.20	Braiding PTFE



Electrical

Frequency	DC-26.5 GHz
Impedance	50 Ω
VSWR Max	1.3
IL Max(1 meter assembly)	2.2dB
*Mechanical Phase Stability	$<\pm 6^\circ$
Amplitude Stability vs Shaking	$<\pm 0.15\text{dB}$

Mechanical & Environmental

Min.Bending Radius Static	31mm
Min. Bending Radius Repeated	62mm
Velocity of Propagation	82%
Weight	86g/m
Temperature(Operation)	-55~125 $^\circ\text{C}$
	-55~165 $^\circ\text{C}$ available on demand

* Wrapped 360° around a 62mm radius mandrel.

Bulk Cable Attenuation(Typical@25°C) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	12000	14000	18000	26500
dB/100 Meter	17.3	31.9	45.5	64.9	80.1	93.1	104.7	115.3	125.1	143.0	176.1
Avg.Power kW	0.940	0.511	0.359	0.251	0.203	0.175	0.156	0.141	0.130	0.114	0.093

Attenuation at any frequency=[0.991549×SQRT(FMHz)]+[0.0005555×FMHz]

- Notes:**
- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as 0.03dB x SQRT Freq(GHz).
 - 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

Typical Test Data (TVAC380-SMAMSMAM-1M-A)

