


## Ultra-Flexible Phase Stable Low Loss Cable Assembly, Using UF360

DC-40 GHz, 2.92mm Male to 2.92mm Male

UF360-292M292M-L(L:Length)

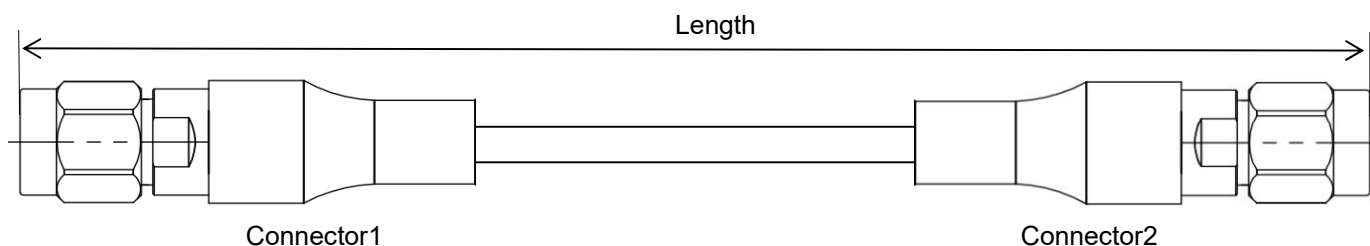


- Length can be in meter or in inch etc, e.g, UF360-292M292M-1M. Standard length tolerance:  $\pm 1.5\%$ . Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

### Configuration

<b>Connector 1</b>	2.92mm male	<b>Connector 2</b>	2.92mm male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated BeCu	Center Contact	Gold plated BeCu
<b>Cable Type</b>	UF360		

### Cable Construction



No.	Construction	Size (mm)	Materials
1	Center Conductor	0.91	Stranded silver plated copper
2	Dielectric	2.50	Low density PTFE
3	Outer Conductor	2.66	Silver plated copper tape wrap
4	Interlayer	2.90	PTFE
5	Outer Shield	3.30	Silver plated copper wire braid
6	Inner Jacket	3.80	PTFE wrapping



### Electrical

Frequency	DC-40 GHz
Impedance	50 $\Omega$
VSWR Max	1.3
IL Max(1 meter assembly)	3.8dB
*Mechanical Phase Stability	$< \pm 5^\circ$
Amplitude Stability vs Shaking	$< \pm 0.15\text{dB}$

### Mechanical & Environmental

Min.Bending Radius Static	18mm
Min. Bending Radius Repeated	36mm
Velocity of Propagation	81%
Temperature(Operation)	-50~85 $^\circ\text{C}$
Temperature(Storage)	-60~85 $^\circ\text{C}$

\* Wrapped 360° around a 36mm radius mandrel.

## Bulk Cable Attenuation(Typical@25℃) & Power(VSWR=1.0; 40℃; Sea level)

Frequency MHz	300	1200	3000	4000	6000	8000	10000	12000	14000	18000	26500	40000
dB/100 Meter	22.3	45.5	73.4	85.4	106.1	124.0	140.0	154.8	168.6	194.0	241.6	306.9
Avg.Power kW	0.740	0.363	0.225	0.193	0.156	0.133	0.118	0.107	0.098	0.085	0.068	0.054

Attenuation at any frequency= $[1.265700 \times \text{SQRT}(\text{FMHz})] + [0.001343 \times \text{FMHz}]$

### Notes:

- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as  $0.03\text{dB} \times \text{SQRT Freq}(\text{GHz})$ .
- 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

## Typical Test Data (UF360-292M292M-1M)

