


## Super Flexible PUR Armored Test Cable Assembly, Using UF370P

DC-50 GHz, 2.4mm Male to 2.4mm Male

UF370P-24M24M-L-AU(L:Length)

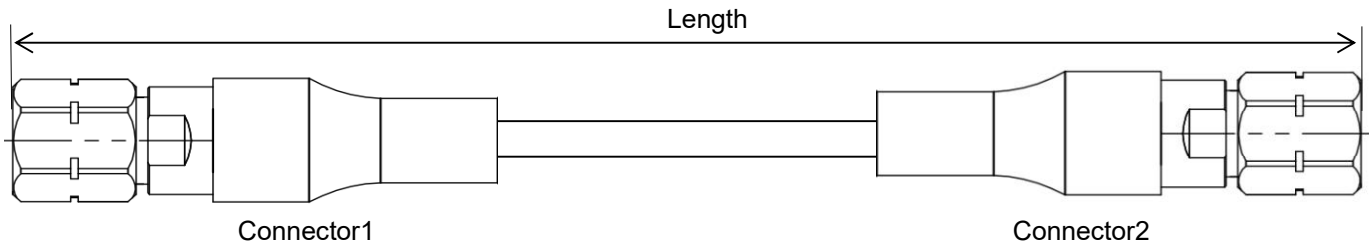


- Length can be in meter or in inch etc, e.g, UF370P-24M24M-1M-AU. Standard length tolerance:  $\pm 1.5\%$ . Custom lengths and other connector types available.
- Length is measured from one connector end to the other connector end as shown above. For RA connectors, use the pin center-line.

### Configuration

Connector 1	2.4mm male	Connector 2	2.4mm male
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated BeCu	Center Contact	Gold plated BeCu
<b>Cable Type</b>	UF370P	<b>Armor</b>	AU660

### Cable Construction



No.	Construction	Size (mm)	Materials
1	Center Conductor	0.72	Stranded silver plated copper
2	Dielectric	2.10	Low density PTFE
3	Outer Conductor	2.30	Silver plated copper strip wrapping
4	Interlayer	2.50	PTFE
5	Outer Shield	2.85	Silver plated copper wire braiding
6	Inner Jacket	3.70	PUR
7	Crush Resistance Layer	4.80	Stainless steel spiral
8	Strengthening Layer	5.40	Silver plated copper braid
9	Armor Jacket	6.60	PUR



### Electrical

Frequency	DC-50 GHz
Impedance	50 $\Omega$
VSWR Max	1.35
IL Max(1 meter assembly)	4.9dB
*Mechanical Phase Stability	$< \pm 10^\circ @ 40\text{GHz}$
Amplitude Stability vs Shaking	$< \pm 0.15\text{dB} @ 50\text{GHz}$

### Mechanical & Environmental

Min.Bending Radius Static	33mm
Min. Bending Radius Repeated	66mm
Velocity of Propagation	76%
Flex Life Min	15000 cycles
Temperature(Operation)	-50 ~ 85 $^\circ\text{C}$
Temperature(Storage)	-60 ~ 85 $^\circ\text{C}$

\* Wrapped 360° around a 66mm radius mandrel.

## Bulk Cable Attenuation(Typical@25°C) & Power(VSWR=1.0; 40°C; Sea level)

Frequency MHz	300	1000	2000	4000	6000	8000	10000	14000	18000	26500	40000	50000
dB/100 Meter	29.0	53.3	75.8	108.0	133.0	154.4	173.3	206.5	235.6	289.1	360.3	406.4
Avg.Power kW	0.600	0.327	0.230	0.161	0.131	0.113	0.101	0.084	0.074	0.060	0.048	0.043

$$\text{Attenuation at any frequency} = [1.664388 \times \text{SQRT}(\text{FMHz})] + [0.0006856 \times \text{FMHz}]$$

- Notes:**
- 1) The above attenuation refers to typical loss of cable only, max loss is 1.1 times of typical loss. Insertion loss per connector is estimated as 0.03dB x SQRT Freq(GHz).
  - 2) Power handling values are calculated based on cable properties. Power handling will vary based on connector type and actual VSWR of the cable assembly.

### Typical Test Data (UF370P-24M24M-1M-AU)

