




Electrical

Frequency Range	26.5-40 GHz
VSWR	1.2 max
Attenuation	40 ± 1.5 dB
Input Avg Power	500 Watts
Peak Power	5 kWatts
Operating Temperature	-40°C~+85°C

Mechanical

Waveguide Size	WR28(R320)
Flange Type(Input&Output)	IEC: UBR320
Material	Aluminum
Internal Finish	Conductive oxidation
External Finish	High temp black painted
Net Weight	Approx 1.8kg

Dimensions(mm)

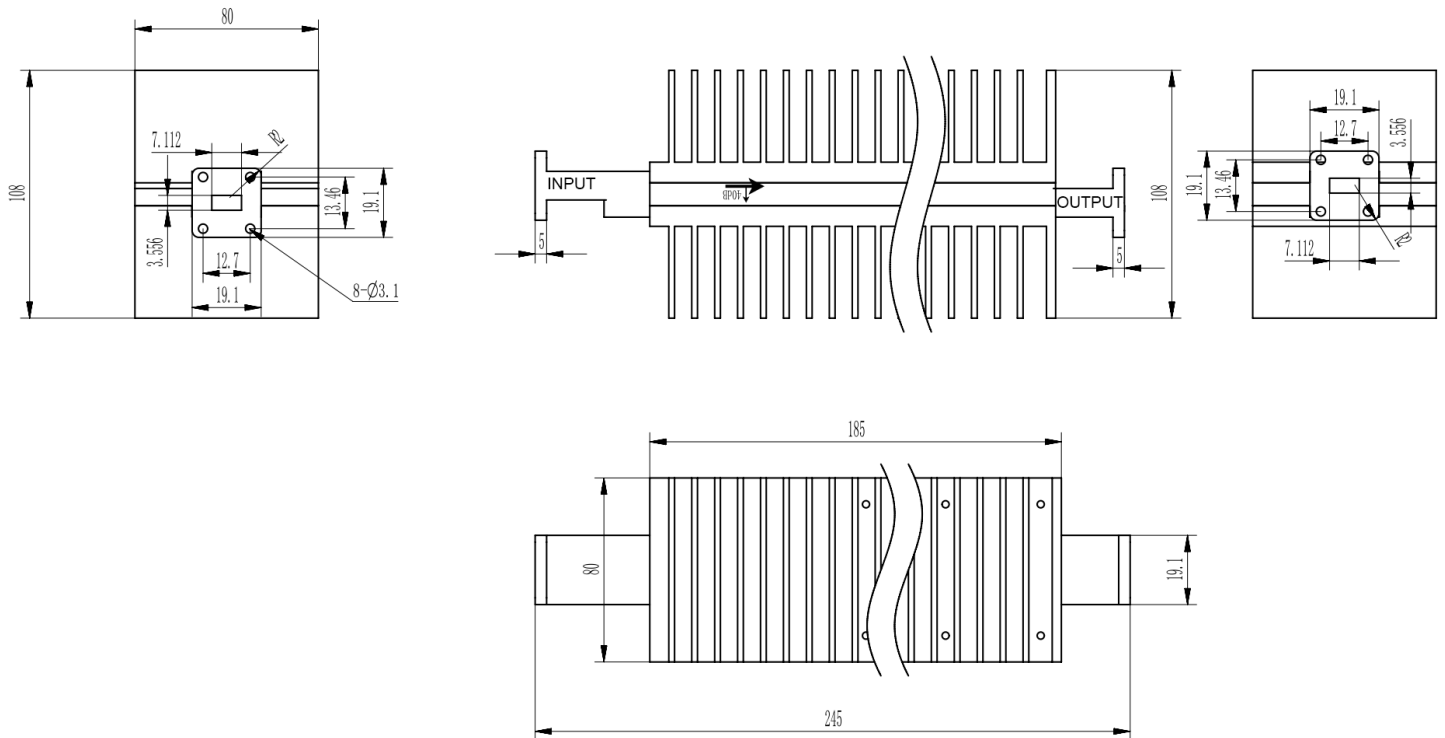



Typical Test Data

