



Waveguide Crossguide Directional Coupler **WDCT112RSF-40**

40dB, WR112, 6.57-9.99 GHz, CPR 112F Cover Flange, SMA Female Coupled Port

Rev 1


Electrical

Frequency Range	6.57-9.99 GHz
VSWR	1.10 max(Main line), 1.3 max (Secondary line)
Coupling	40 ± 1.5 dB
Directivity	15 dB min
Operating Temperature	-40°C ~+70°C

Mechanical

Waveguide Size	WR112(R84)
Flange Type	CPR112 F
Flange Material and plating	Aluminum, Conductive oxidation
Body Material and Plating	Aluminum, Painted
Coupled Port	SMA Female

Dimensions(mm)

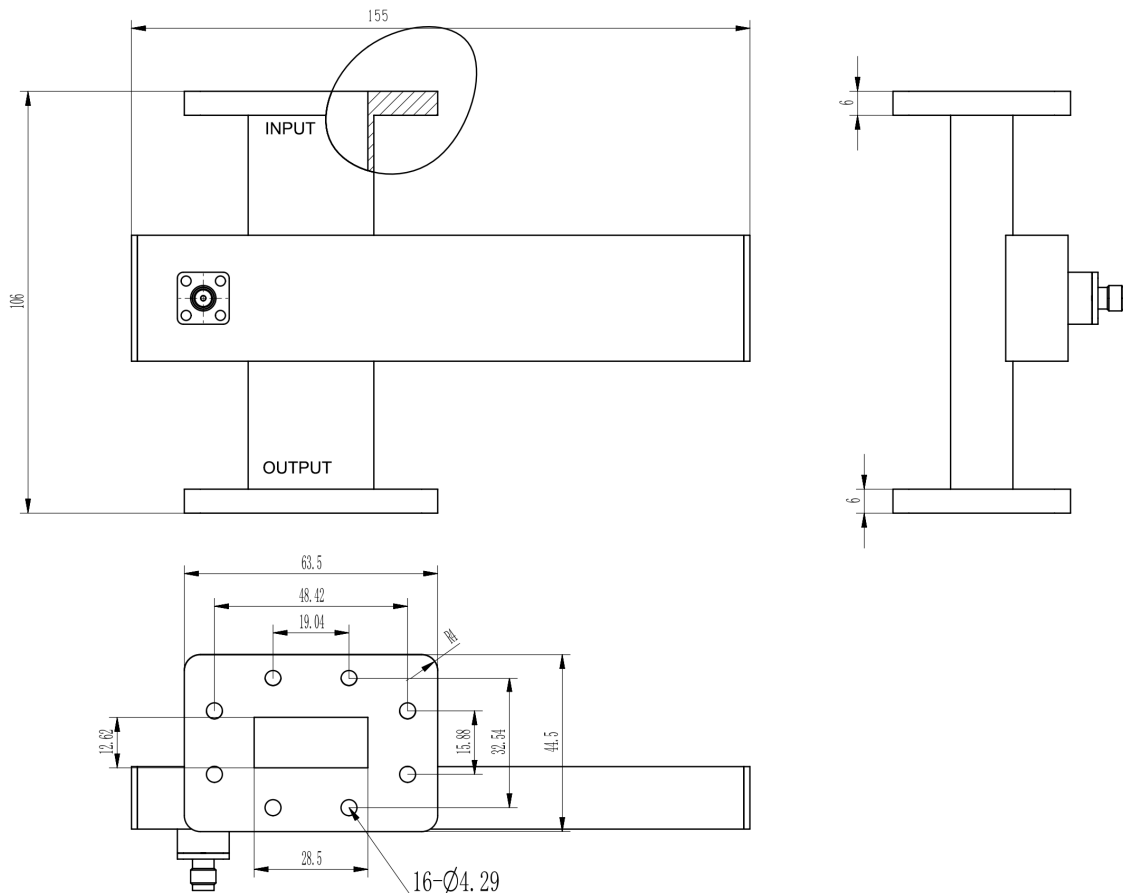





Waveguide Crossguide Directional Coupler **WDCT112RSF-40**

40dB, WR112, 6.57-9.99 GHz, CPR 112F Cover Flange, SMA Female Coupled Port

Rev 1

Typical Test Data

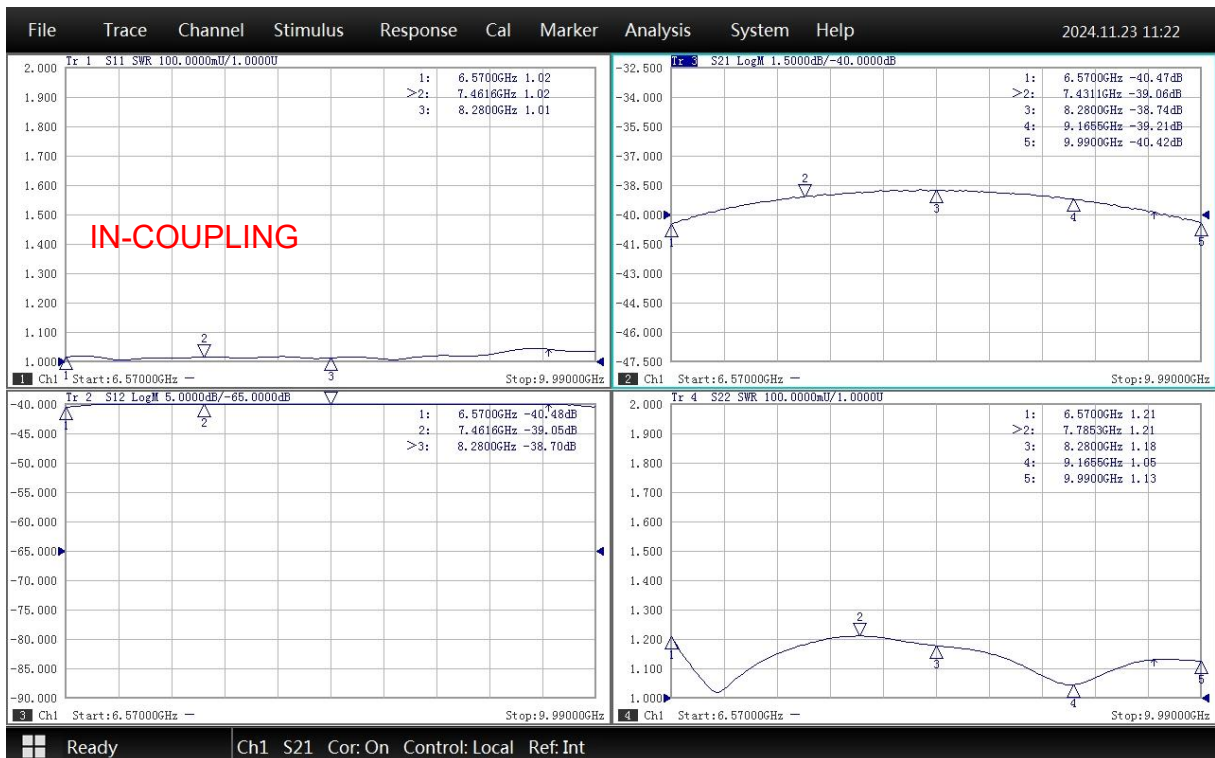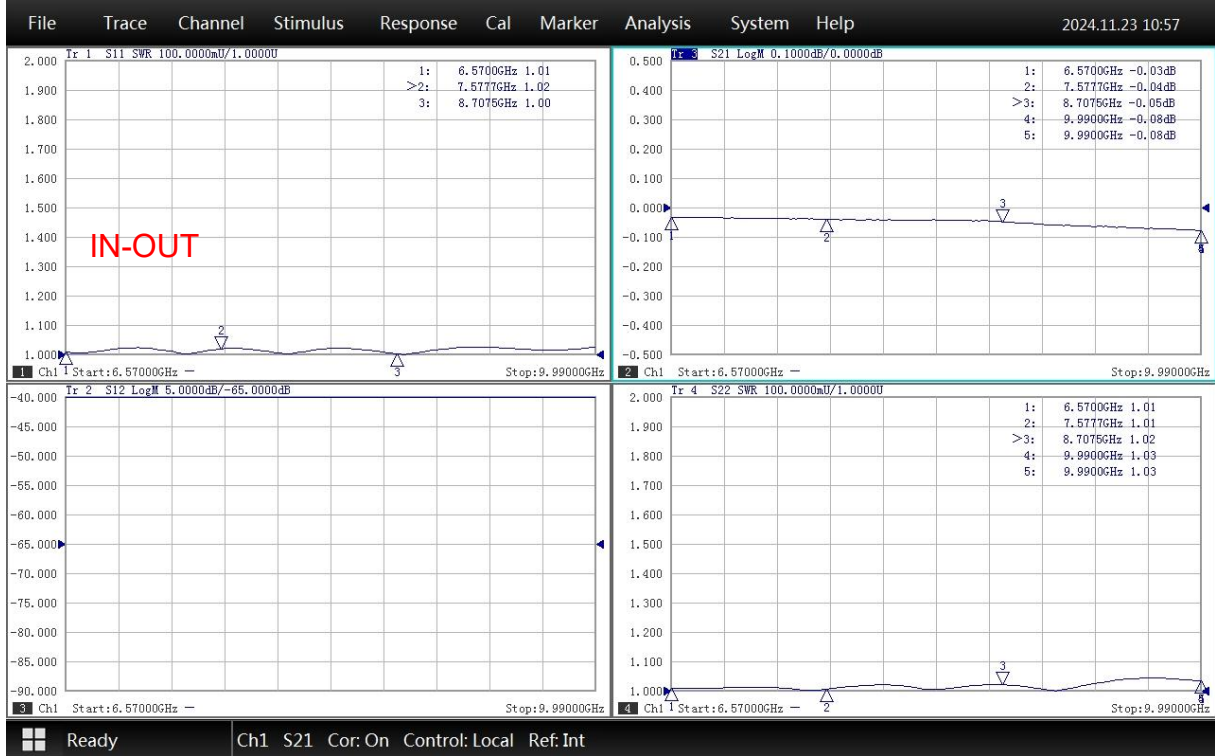



Waveguide Crossguide Directional Coupler **WDCT112RSF-40**

40dB, WR112, 6.57-9.99 GHz, CPR 112F Cover Flange, SMA Female Coupled Port

Rev 1

