



Waveguide Crossguide Directional Coupler **WDCT28292F-40**

40dB, WR28, 26.3-40 GHz, UBR320 Square Cover Flange, 2.92mm Female Coupled Port

Rev 1


Electrical

Frequency Range	26.3-40 GHz
VSWR	1.10 max(Main line), 1.25 max (Secondary line)
Coupling	40 ± 1.5 dB
Directivity	15 dB min
Operating Temperature	-40°C~+70°C

Mechanical

Waveguide Size	WR28(R320)
Flange Type	UBR320
Flange Material	Aluminum, Conductive oxidation
Body Material and Plating	Aluminum, Painted
Coupled Port	2.92mm Female

Dimensions(mm)

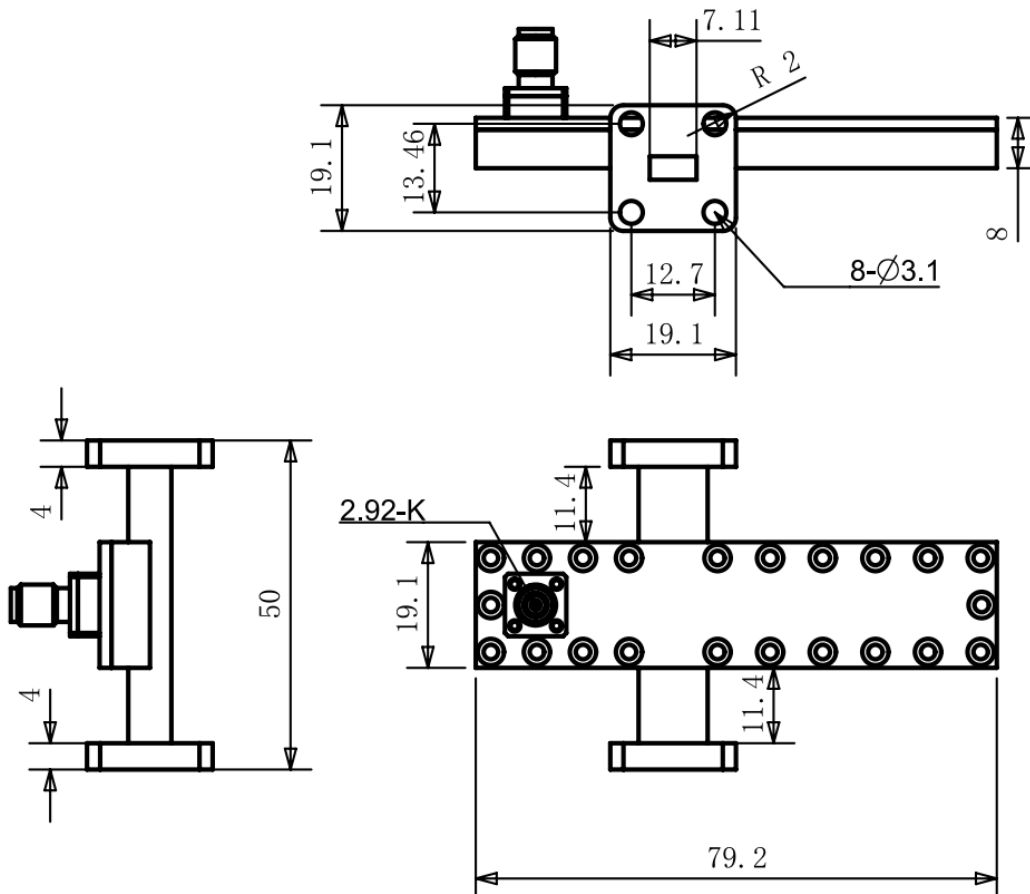

Typical Test Data



Waveguide Crossguide Directional Coupler

WDCT28292F-40

40dB, WR28, 26.3-40 GHz, UBR320 Square Cover Flange, 2.92mm Female Coupled Port

Rev 1

