# Waveguide Termination WT112D2500

## WR112, 6.57-9.99 GHz, 2500 Watts, Rectangular Cover Flange

Rev 2

## Electrical

| | |
|---|---|
| **Frequency Range** | 6.57-9.99 GHz |
| **VSWR** | 1.2 max |
| **Input Avg Power** | 2500 Watts @ 25℃ |
| **Peak Power** | 25 kWatts |
| **Operating Temperature** | -40℃~+70℃ |

## Mechanical

| | |
|---|---|
| **Waveguide Size** | WR112(R84) |
| **Flange Type** | IEC: UDR84 |
| **Waveguide Material** | Aluminum |
| **Waveguide Finish** | Black painted |
| **Heat Sink Material** | Aluminum |
| **Heat Sink Finish** | Black painted |
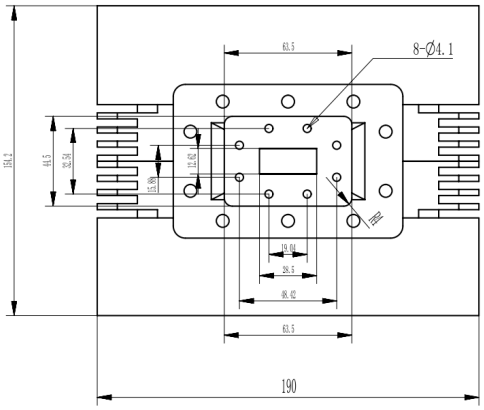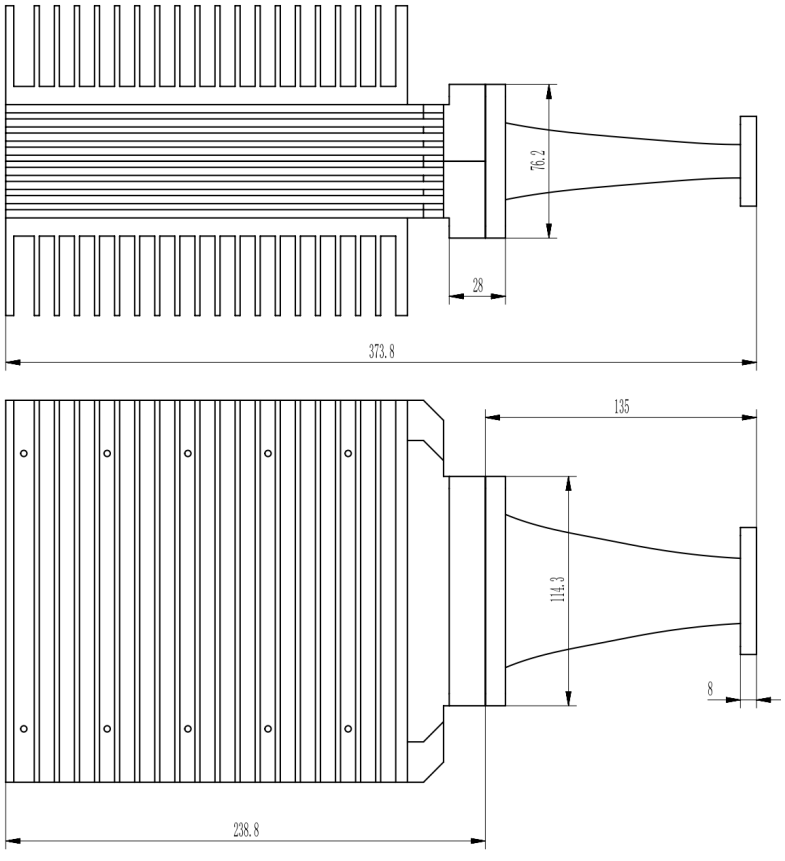
## Dimensions(mm)