Waveguide Termination WT229A2500

WR229, 3.22-4.90 GHz, 2500 Watts, Rectangular Cover Flange

Rev 1

Electrical

Impedance	50 ohm
Frequency Range	3.22-4.90 GHz
VSWR	1.2 max
Input Avg Power	2500 Watts @ 25℃
Peak Power	25 kWatts
Operating Temperature	-40℃~+70℃

Mechanical

Waveguide Size	WR229(R40)
Flange Type	IEC: UDR40
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted
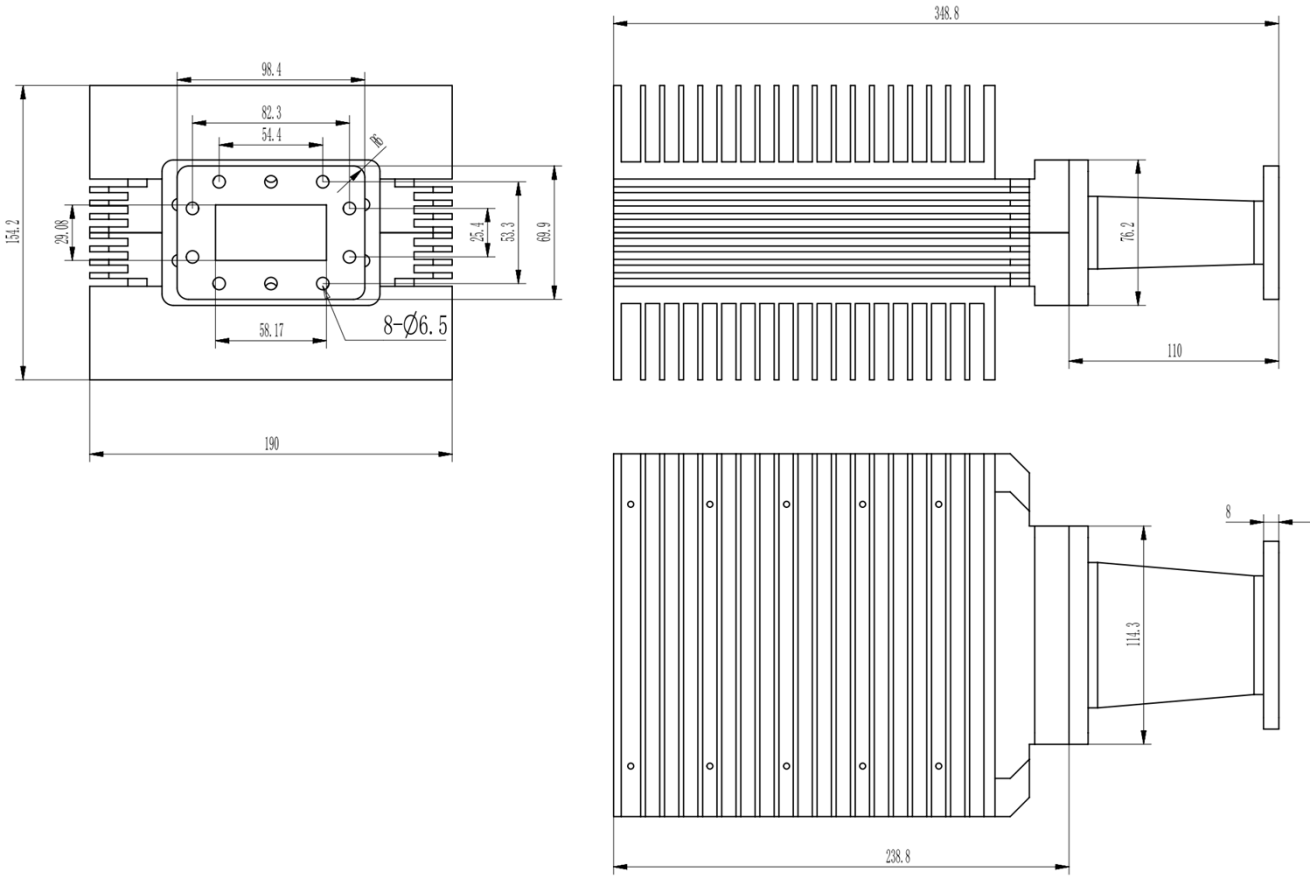
Dimensions(mm)