Waveguide Termination

WT250D2000

WRD250, 2.6-7.8 GHz, 2000 Watts, Rectangular Cover Flange



Rev 1


Electrical

Frequency Range	2.6-7.8 GHz
VSWR	1.25 max
Input Avg Power	2000 Watts @ 25℃
Peak Power	20 kWatts
Operating Temperature	-40℃~+70℃

Mechanical

Waveguide Size	WRD250
Flange Type	Rectangular Cover, FPWRD250
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted
Net Weight	Approx 11.5kg

Dimensions(mm)

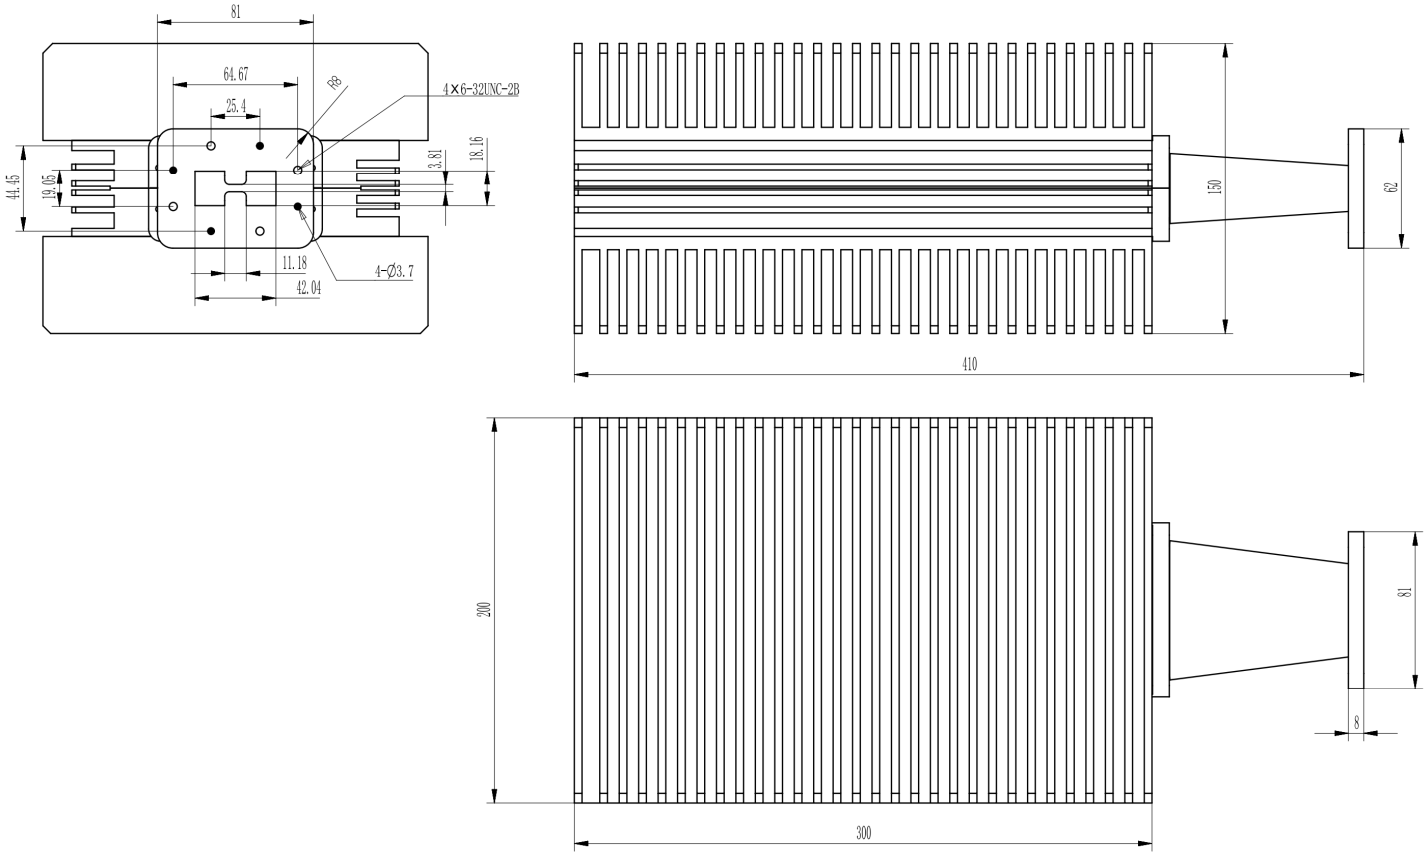

Waveguide Termination

WT250D2000

WRD250, 2.6-7.8 GHz, 2000 Watts, Rectangular Cover Flange



Rev 1

Typical Test Data

