



## Waveguide Termination

**WT284A200**

**WR284, 2.60-3.95 GHz, 200 Watts, Rectangular Cover Flange**

Rev 1


### Electrical

Impedance	50 ohm
Frequency Range	2.60-3.95 GHz
VSWR	1.2 max
Input Avg Power	200 Watts @ 25°C
Operating Temperature	-40°C~+70°C

### Mechanical

Waveguide Size	WR284(R32)
Flange Type	IEC: UDR32
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted

### Dimensions(mm)

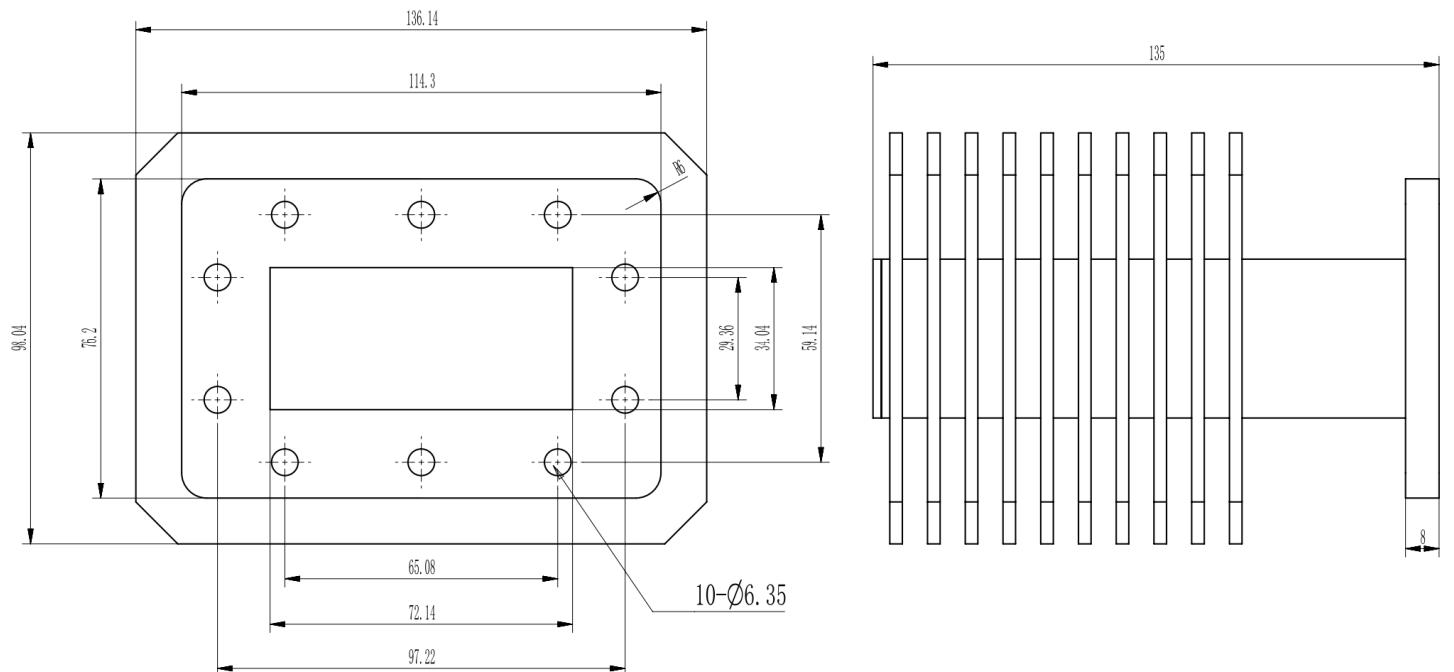



# Waveguide Termination

**WT284A200**

**WR284, 2.60-3.95 GHz, 200 Watts, Rectangular Cover Flange**

Rev 1

## Typical Test Data

