




#### Electrical

|                       |                 |
|-----------------------|-----------------|
| Frequency Range       | 21.7-33.0 GHz   |
| VSWR                  | 1.05 max        |
| Input Avg Power       | 0.5 Watts @ 25℃ |
| Operating Temperature | -40℃~+70℃       |

#### Mechanical

|                    |              |
|--------------------|--------------|
| Waveguide Size     | WR34(R260)   |
| Flange Type        | IEC: UBR260  |
| Waveguide Material | Copper       |
| Waveguide Finish   | Grey painted |

#### Dimensions(mm)

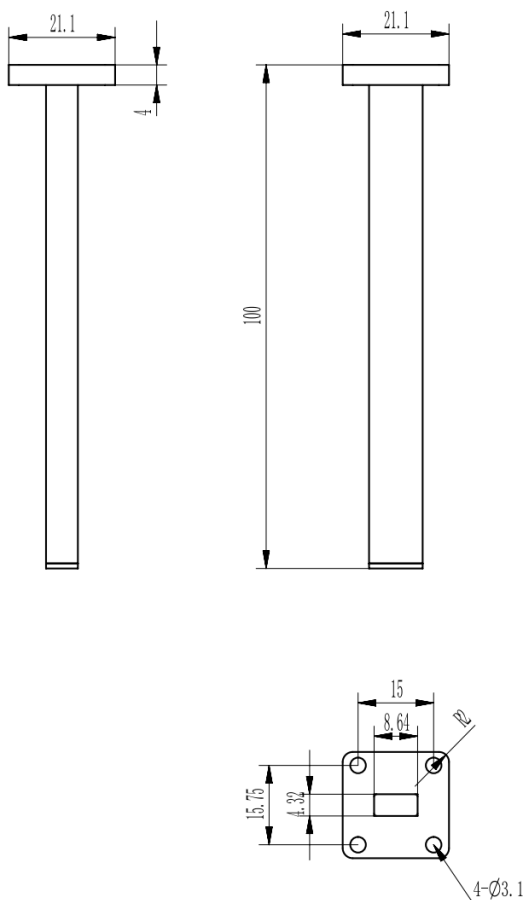



## Typical Test Data

