

Waveguide Termination

WT750D

WRD750, 7.5-18 GHz, 5 Watts, FPWRD750 Flange



Rev 1


Electrical

Frequency Range	7.5-18 GHz
VSWR	1.05 max
Input Avg Power	5 Watts max @ 25°C
Operating Temperature	-40°C~+70°C

Mechanical

Waveguide Size	WRD750
Flange Type	FPWRD750
Waveguide Material	Aluminum
Waveguide Finish	Grey painted
Net Weight	220g

Dimensions(mm)

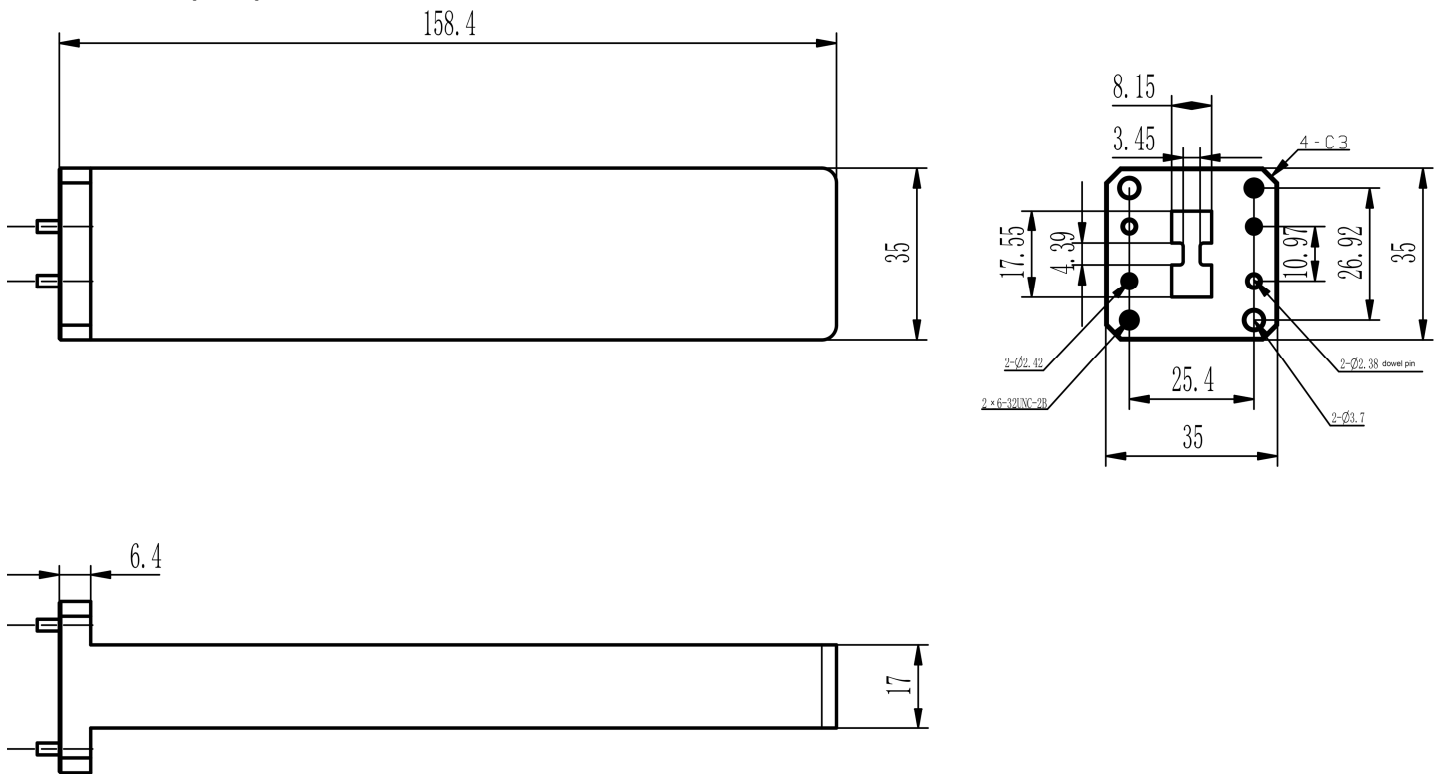



Typical Test Data

