



1400-1800MHz Band Pass Filter


BPF-1600MS1

RVA 1

Specifications

1	Pass Band Frequency	1400 - 1800 MHz
2	Pass Band Insertion Loss	≤2 dB
3	Pass Band VSWR	1.6 max
4	Stop Band Rejection	≥60dB @ DC - 1320MHz ≥60dB @ 1880 - 2100MHz
5	Impedance	50 Ohms
6	Power Handling	10W max.
7	Connectors	SMA-Female
8	Surface Finish	Black Painted
9	Temperature Range	-55℃ ~ +85℃

Dimensions (mm)

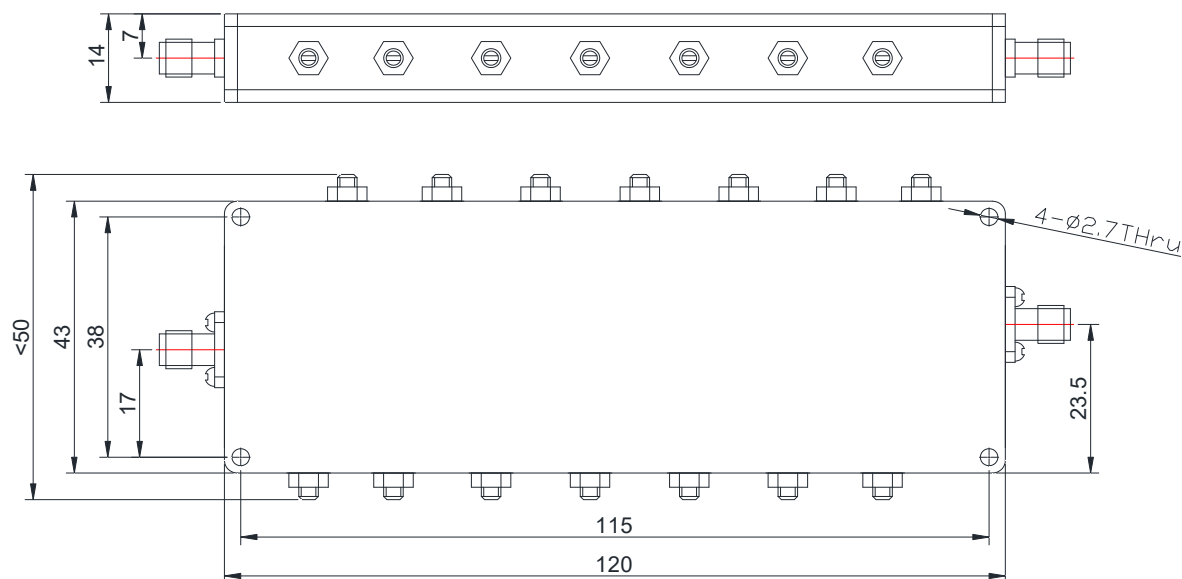



1400-1800MHz Band Pass Filter

BPF-1600MS1

RVA 1

Typical Test Data

