27-37 GHz Band Pass Filter BPF-32000MK1

RVA 1

Specifications

1	Center Frequency(F0)	32000MHz	
2	Pass Band Frequency	27000 ~ 37000 MHz	
3	Pass Band Insertion Loss	≤1.35dB	
4	Pass Band Ripple	≤0.56dB	
5	Pass Band Return Loss	≥17dB	
6	Stop Band Rejection	≥80dB @ DC ~ 25.25GHz ≥45dB @ 25.25 ~ 26GHz	≥44dB @ 38 ~ 38.72GHz ≥80dB @ 38.72 ~ 60GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.92mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
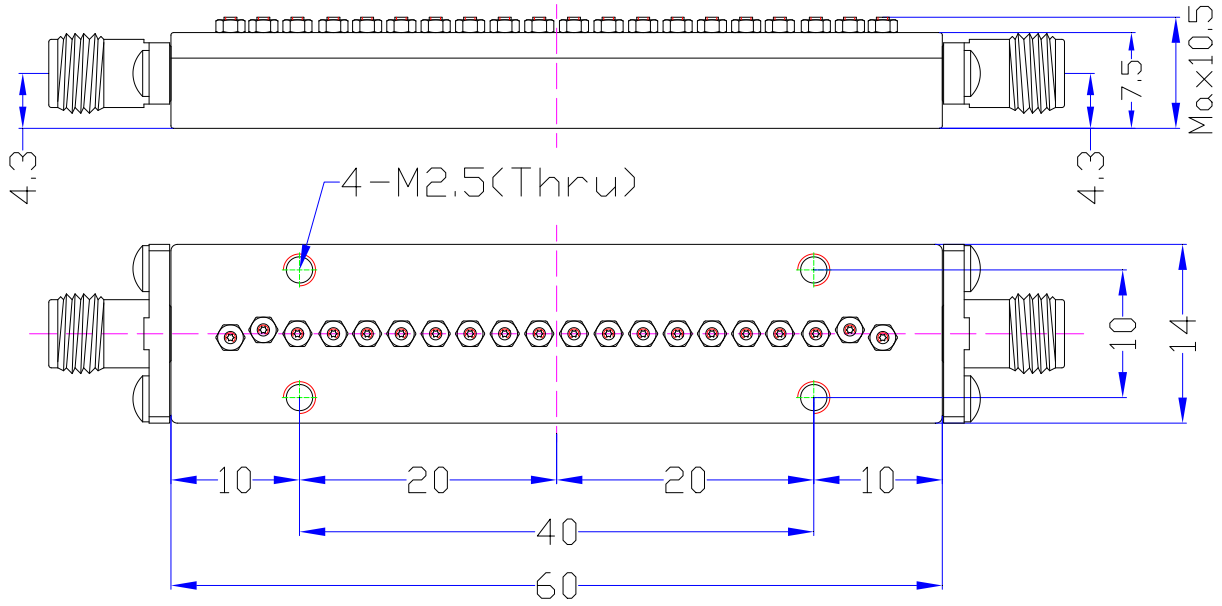
Dimensions(mm)