26-42 GHz Band Pass Filter BPF-34000MQ1

RVA 1

Specifications

1	Center Frequency(F0)	34000MHz	
2	Pass Band Frequency	26000 ~ 42000 MHz	
3	Pass Band Insertion Loss	≤1.05dB	
4	Pass Band Ripple	≤0.43dB	
5	Pass Band Return Loss	≥16dB	
6	Stop Band Rejection	≥80dB @ DC ~ 23.6GHz ≥31dB @ 23.6 ~ 25GHz	≥27dB @ 43 ~ 44.68GHz ≥80dB @ 44.68 ~ 55GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
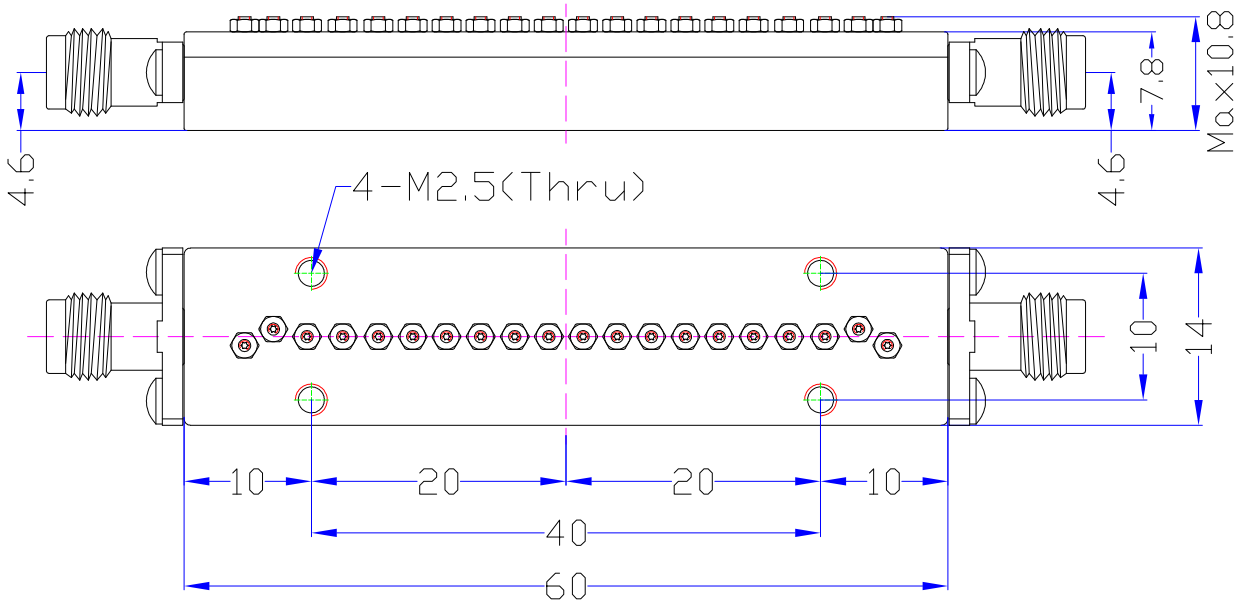
Dimensions(mm)