27-42 GHz Band Pass Filter BPF-34500MQ1

RVA 1

Specifications

1	Center Frequency(F0)	34500MHz	
2	Pass Band Frequency	27000 ~ 42000 MHz	
3	Pass Band Insertion Loss	≤1.1dB	
4	Pass Band Ripple	≤0.45dB	
5	Pass Band Return Loss	≥16dB	
6	Stop Band Rejection	≥80dB @ DC ~ 24.71GHz ≥31dB @ 24.71 ~ 26GHz	≥30dB @ 43 ~ 44.54GHz ≥80dB @ 44.54 ~ 56GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
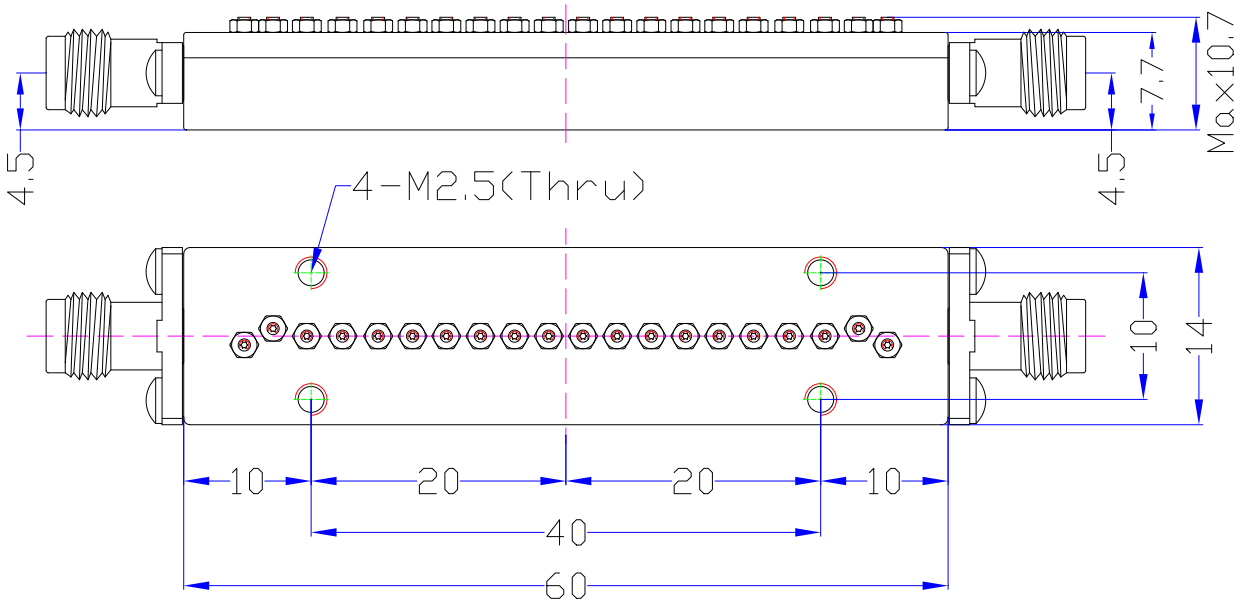
Dimensions(mm)