27-43 GHz Band Pass Filter BPF-35000MQ3

RVA 1

Specifications

1	Center Frequency(F0)	35000MHz	
2	Pass Band Frequency	27000 ~ 43000 MHz	
3	Pass Band Insertion Loss	≤1.05dB	
4	Pass Band Ripple	≤0.44dB	
5	Pass Band Return Loss	≥16dB	
6	Stop Band Rejection	≥80dB @ DC ~ 24.56GHz ≥30dB @ 24.56 ~ 26GHz	≥23dB @ 44 ~ 45.87GHz ≥80dB @ 45.87 ~ 55GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
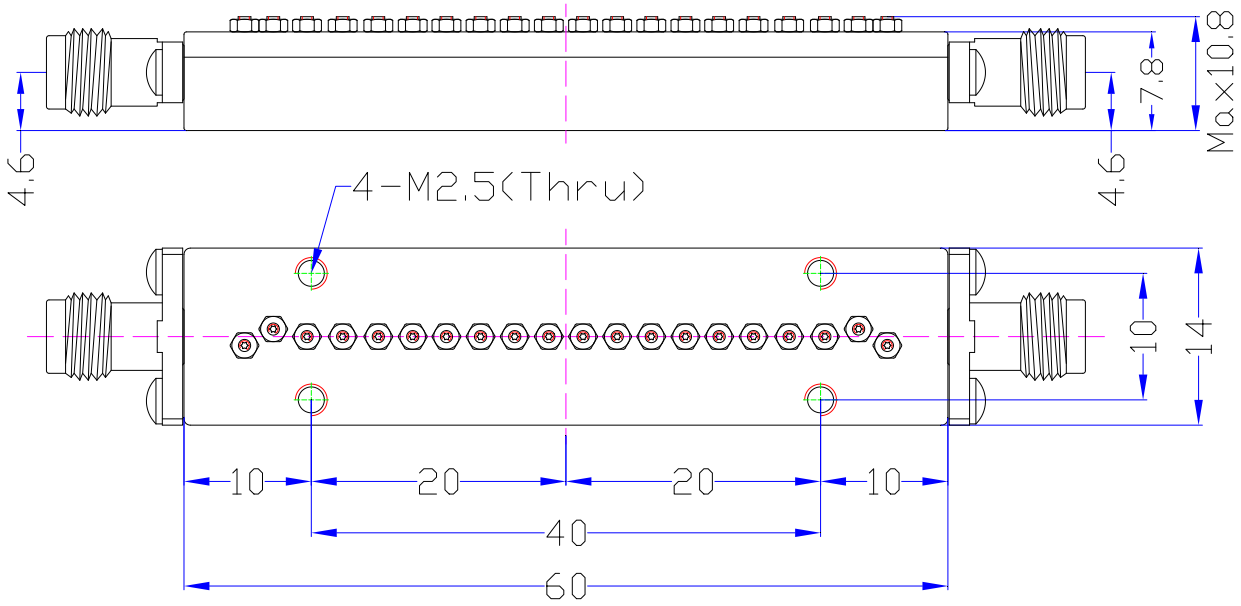
Dimensions(mm)