29-43 GHz Band Pass Filter BPF-36000MQ3

RVA 1

Specifications

1	Center Frequency(F0)	36000MHz	
2	Pass Band Frequency	29000 ~ 43000 MHz	
3	Pass Band Insertion Loss	≤1.15dB	
4	Pass Band Ripple	≤0.49dB	
5	Pass Band Return Loss	≥16dB	
6	Stop Band Rejection	≥80dB @ DC ~ 26.77GHz ≥31dB @ 26.77 ~ 28GHz	≥27dB @ 44 ~ 45.58GHz ≥80dB @ 45.58 ~ 58GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
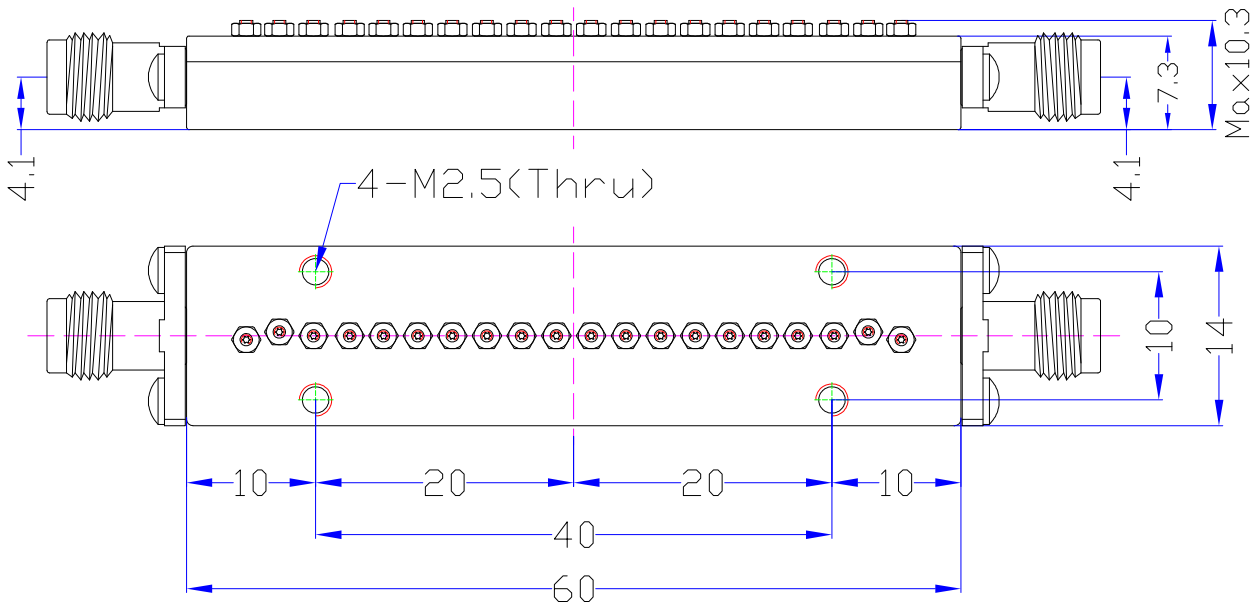
Dimensions(mm)