37-41 GHz Band Pass Filter BPF-39000MQ3

RVA 1

Specifications

1	Center Frequency(F0)	39000MHz	
2	Pass Band Frequency	37000 ~ 41000 MHz	
3	Pass Band Insertion Loss	≤1.8dB	
4	Pass Band Ripple	≤0.61dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 35.65GHz ≥50dB @ 35.65 ~ 36.13GHz	≥50dB @ 41.98 ~ 42.57GHz ≥80dB @ 42.57 ~ 70GHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	2.4mm Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
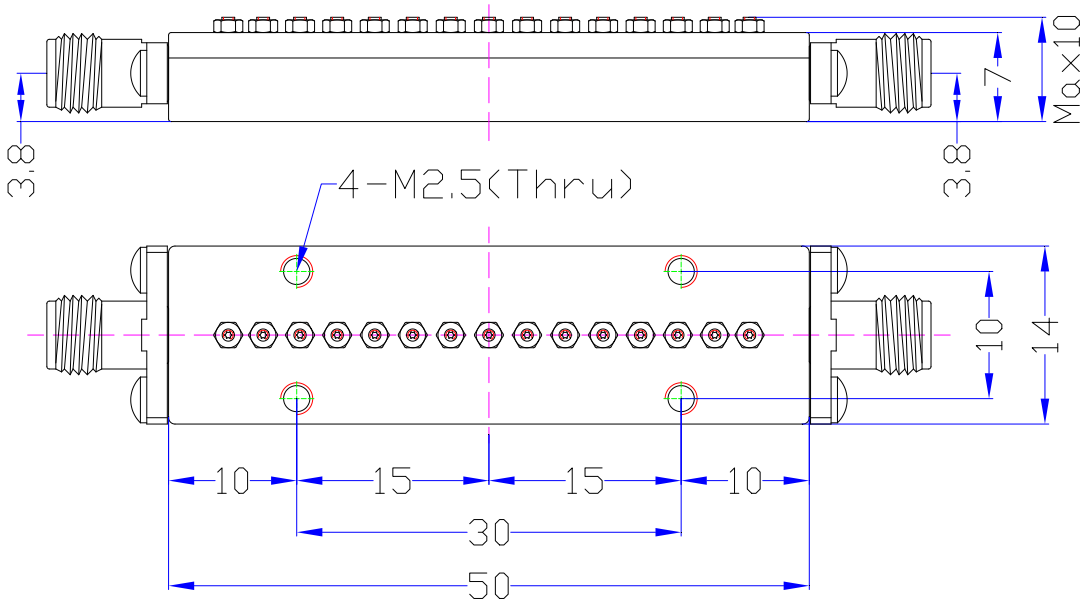
Dimensions(mm)