



4050-6100 MHz Band Pass Filter


BPF-5075MS1

RVA 1

Specifications

1	Center Frequency (F0)	5075MHz	
2	Pass Band Frequency	4050 ~ 6100 MHz	
3	Pass Band Insertion Loss	≤0.8dB	
4	Pass Band Ripple	≤0.5dB	
5	Pass Band Return Loss	≥20dB	
6	Stop Band Rejection	≥80dB @ DC ~ 3000MHz ≥50dB @ 3000 ~ 3500MHz	≥80dB @ 6650 ~ 15000MHz
7	Impedance	50 Ohms	
8	Power Handling	10W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
12	Weight	128g	

Dimensions(mm)

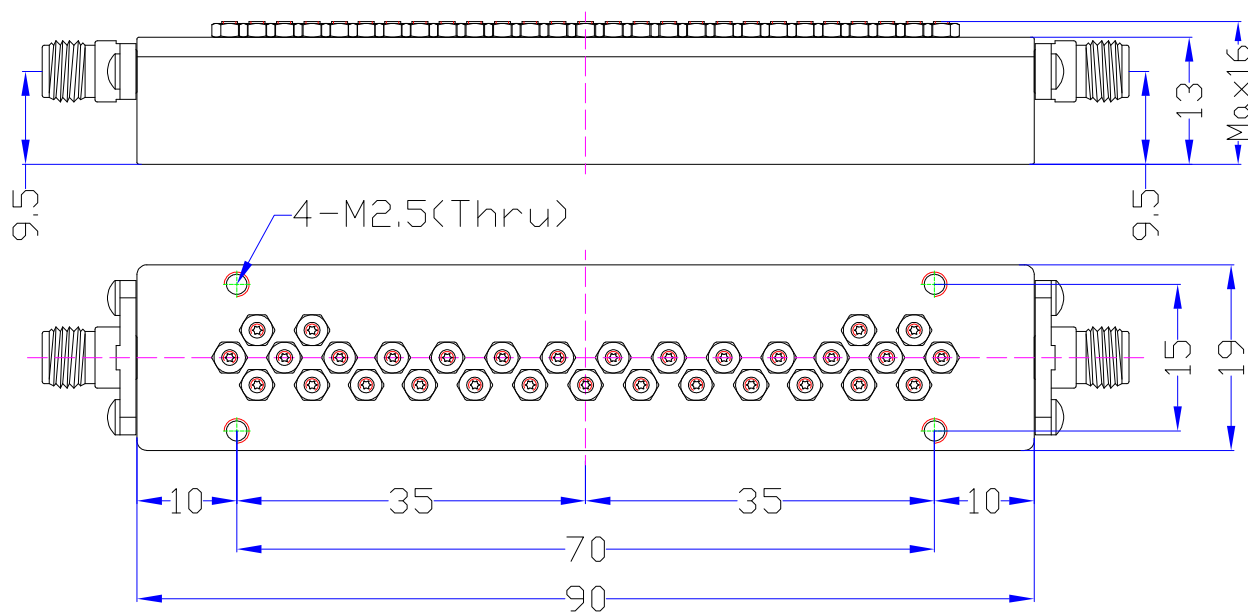



4050-6100 MHz Band Pass Filter

BPF-5075MS1

RVA 1

Typical Test Data

