



3600-7000 MHz Band Pass Filter


BPF-5300MS1

RVA 1

Specifications

1	Center Frequency(F0)	5300MHz	
2	Pass Band Frequency	3600 ~ 7000 MHz	
3	Pass Band Insertion Loss	≤0.8dB	
4	Pass Band Ripple	≤0.55dB	
5	Pass Band Return Loss	≥15dB	
6	Stop Band Rejection	≥80dB @ DC ~ 2400MHz ≥70dB @ 2400 ~ 2600MHz	≥80dB @ 7450 ~ 12000MHz
7	Impedance	50 Ohms	
8	Power Handling	5W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	

Dimensions(mm)

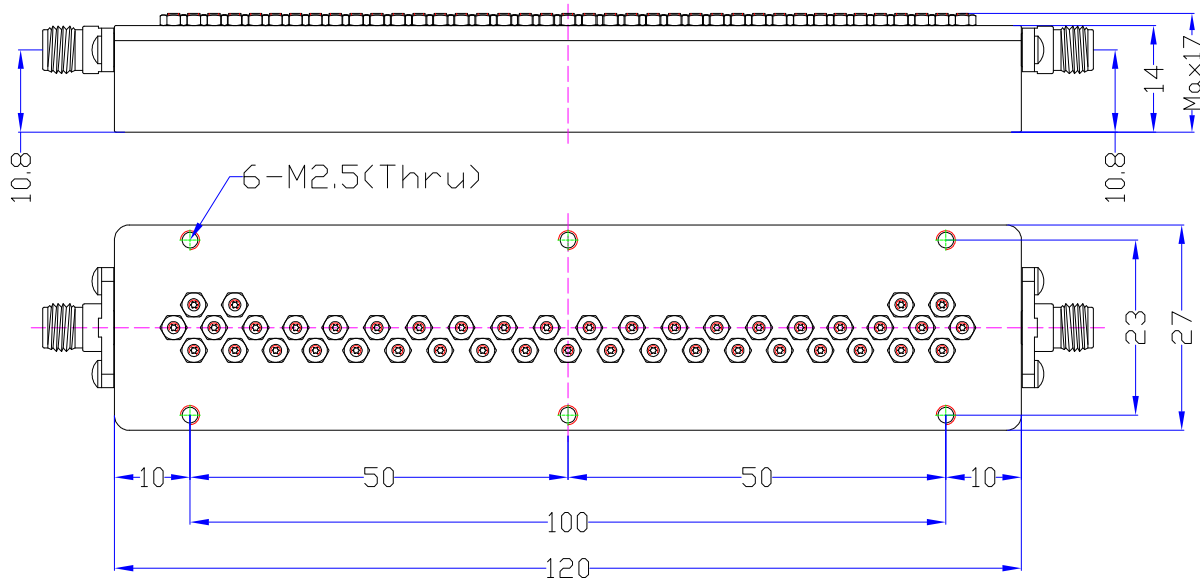



3600-7000 MHz Band Pass Filter

BPF-5300MS1

RVA 1

Typical Test Data

