

Coaxial Fixed Attenuator

RFH40XX292D45



DC-40 GHz, 10-40 dB, 45 Watts, 2.92mm, Unidirectional

Electrical


| Impedance | 50 ohm | | | | |
|-----------------|---|-----------|-----------|-----------|--|
| Frequency Range | DC-40 GHz | | | | |
| VSWR | 1.38 max | | | | |
| Input Avg Power | 45W@ 25 $^\circ\!\mathrm{C}$ ambient, derating linearly to 4.5W at 100 $^\circ\!\mathrm{C}$ | | | | |
| Peak Power | 200W (5 micro-sec pulse width, 10% duty cycle) | | | | |
| Direction | Unidirectional, 2.92mm male input, 2.92mm female output (other configurations available) | | | | |
| Attenuation(dB) | 10 | 20 | 30 | 40 | |
| Accuracy(dB) | -2.8/+3.2 | -2.2/+2.5 | -2.2/+2.2 | -2.2/+2.2 | |

Mechanical

| Connector Body | Passivated stainless steel | Operating Temperature | -55℃ to 100℃ |
|----------------|----------------------------|-------------------------|----------------------------|
| Heat Sink | Black anodized aluminum | Storage Temperature | -55℃ to 125℃ |
| Center Contact | 1.27um Gold plated BeCu | RoHS | Compliant |
| Net Weight | About 180 g | Temperature Coefficient | <0.0004 dB/dB/ ℃ |

Environmental

Dimensions(mm)

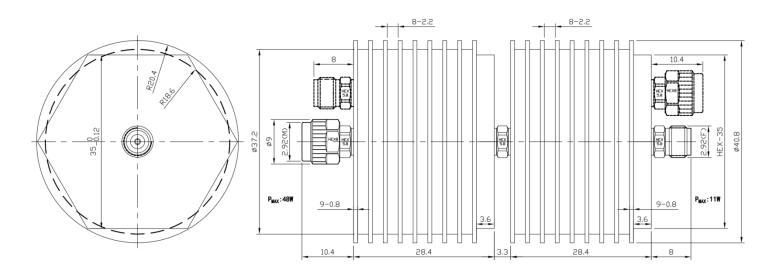

Notes

1.Always pay attention to the direction of attenuators.
2.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
3.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description RFH40XX292D45


1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration:

A=female for two ends; B=male for two ends

C=female for input and male for output;

D=male for input and female for output.

Typical Test Data(Contact us at <u>sales@rfone.cn</u> for test plots of more models)

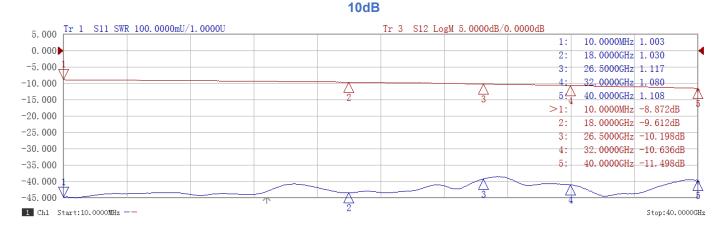

20dB



30dB



40dB

