

## **Coaxial Fixed Attenuator**

# RFH40XX292D50



# DC-40 GHz, 10-40 dB, 50 Watts, 2.92mm, Unidirectional

Rev 3

#### **Electrical**

Impedance	50 ohm				
Frequency Range	DC-40 GHz				
VSWR	1.38 max				
Input Avg Power	50W@ 25℃ ambient, derating linearly to 5W at 100℃				
Peak Power	200W (5 micro-sec pulse width, 10% duty cycle)				
Direction	Unidirectional, 2.92mm male input, 2.92mm female output (other configurations available)				
Attenuation(dB)	10	20	30	40	
Accuracy(dB)	-2 8/+3 2	-2 2/+2 5	-2 2/+2 2	-2 2/+2 2	


#### Mechanical

Connector Body	Passivated stainless steel	
Heat Sink	Black anodized aluminum	
Center Contact	1.27um Gold plated BeCu	
Net Weight	About 280 g	

#### **Environmental**

Operating Temperature	-55℃ to 100℃	
Storage Temperature	-55℃ to 125℃	
RoHS	Compliant	
Temperature Coefficient	<0.0004 dB/dB/℃	

### Dimensions(mm)

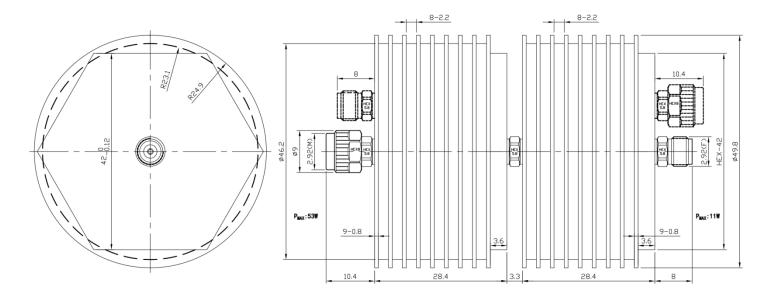

### **Notes**


- 1. Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under  $85^{\circ}$ C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.

## **Model Description**

### RFH40XX292D50

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
- A=female for two ends; B=male for two ends
- C=female for input and male for output;
- D=male for input and female for output.

#### 10dB

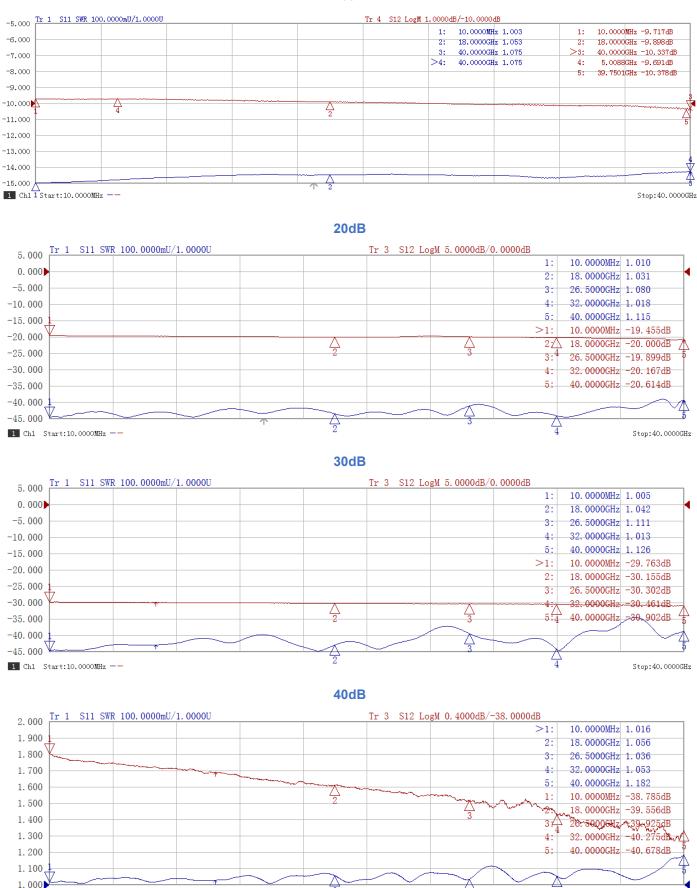

Stop: 40.0000GHz

1 Ch1 Start:10.0000MHz --