

# **Coaxial Fixed Attenuator**

# **RFHB04XX4310C10**



## DC-4 GHz, 1-50 dB, 10 Watts, 4.3-10, Bidirectional


Rev


Electrical					
Impedance	50 ohm				
Frequency Range	DC-4 GHz				
VSWR	1.15 max				
Input Avg Power	10W@ 25 $^\circ C$ ambient, derating linearly to 1W at 100 $^\circ C$				
Peak Power	500W (5 micro-sec pulse width, 1% duty cycle)				
Direction	Bidirectional, 4.3-10 female to 4.3-10 male (other configurations available)				
Attenuation(dB)	1-6	7-10	11-20	21-30	31-50
Accuracy(dB)	±0.3	±0.5	±0.6	±0.8	±0.8

#### Mechanical

Mechanical		Environmental	
Connector Body	Ternary alloy plated brass	Operating Temperature	<b>-55℃ to 100℃</b>
Heat Sink	Black anodized aluminum	Storage Temperature	<b>-55℃ to 125℃</b>
Center Contact	Gold plated beryllium copper/brass	RoHS	Compliant
Net Weight	About 100 g	Temperature Coefficient	<b>&lt;0.0004 dB/dB/</b> ℃

### Dimensions(mm)

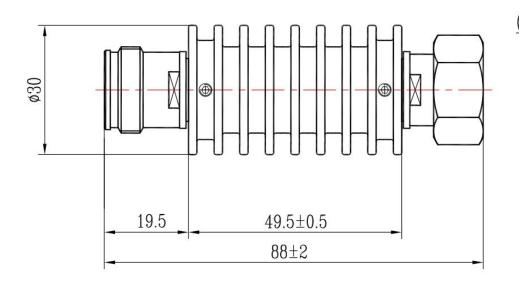



#### Notes

1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C. 2.Customized dB values, outlines and optimal accuracy/VSWR available.

## **Model Description**

### RFHB04XX4310C10

1.XX for dB value: 06=6dB,30=30dB 2.Code for connector configuration: A=female for two ends; B=male for two ends

C=female for one end and male for the other.