

# **Coaxial Fixed Attenuator**

### RFHB12XXNC25



# DC-12.4 GHz, 1-50 dB, 25 Watts, N, Bidirectional

Rev 3

#### **Electrical**

Impedance	50 ohm			
Frequency Range	DC-12.4 GHz			
VSWR	1.35 max			
Input Avg Power	25W@ 25℃ ambient, derating linearly to 2.5W at 100℃			
Peak Power	1kW (5 micro-sec pulse width, 1% duty cycle)			
Direction	Bidirectional, N female to N male (other configurations available)			
Attenuation(dB)	1-10	11-20	21-30	40,50
Accuracy(dB)	±0.7	±0.8	±0.9	±1.0


#### Mechanical

Connector Body	Ternary alloy plated brass	
Heat Sink	Black anodized aluminum	
Center Contact	Gold plated beryllium copper/brass	
Net Weight	About 140 g	

#### **Environmental**

Operating Temperature	-55℃ to 100℃	
Storage Temperature	-55℃ to 125℃	
RoHS	Compliant	
Temperature Coefficient	<0.0004 dB/dB/℃	

### Dimensions(mm)

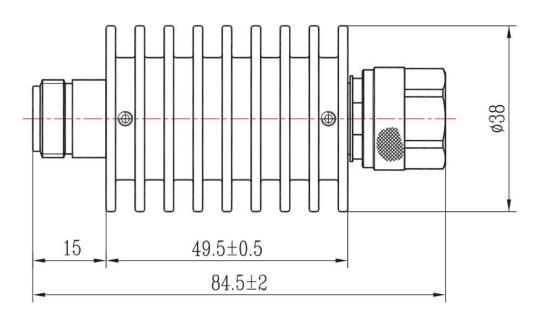



#### **Notes**

- 1.To maintain best performance, recommended to use fan to keep the case temperature under  $85\,^\circ\!\mathrm{C}\,.$
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

### **Model Description**

## RFHB12XXNC25

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
- A=female for two ends; B=male for two ends C=female for one end and male for the other.