

## **Coaxial Fixed Attenuator**

## RFHB40XX292C5



# DC-40 GHz, 1-40 dB, 5 Watts, 2.92mm, Bidirectional

Rev 3

### **Electrical**

Impedance	50 ohm			
Frequency Range	DC-40 GHz			
VSWR	1.26 max			
Input Avg Power	5W@ 25℃ ambient, derating linearly to 1W at 100℃			
Peak Power	200W (5 micro-sec pulse width, 1% duty cycle)			
Direction	Bidirectional, 2.92mm female to 2.92mm male (other configurations available)			
Attenuation(dB)	1-3	4-8	9-25	26-40
Accuracy(dB)	-0.7/+1.0	-0.7/+1.0	-0.8/+0.8	-0.9/+1.0


### Mechanical

Connector Body	Passivated stainless steel	
Heat Sink	Black anodized aluminum	
Center Contact	1.27um Gold plated BeCu	
Net Weight	About 25 g	

### **Environmental**

Operating Temperature	-55℃ to 100℃
Storage Temperature	-55℃ to 125℃
RoHS	Compliant
Temperature Coefficient	<0.0004 dB/dB/℃

## Dimensions(mm)

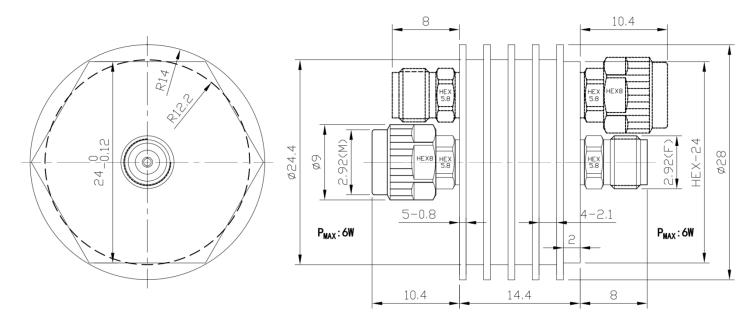

### **Notes**

- 1.To maintain best performance, recommended to use fan to keep the case temperature under  $85^{\circ}$ C.
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

### **Model Description**

### RFHB40<u>XX</u>292<u>C</u>5

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
- A=female for two ends; B=male for two ends C=female for one end and male for the other.

#### 6dB

