

Waveguide Termination

WT112A600

WR112, 6.57-9.99 GHz, 600 Watts, Square Cover Flange



Rev 1


Electrical

Impedance	50 ohm
Frequency Range	6.57-9.99 GHz
VSWR	1.2 max
Input Avg Power	600 Watts @ 25°C
Operating Temperature	-40°C~+70°C

Mechanical

Waveguide Size	WR112(R84)
Flange Type	IEC: UBR84
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted

Dimensions(mm)

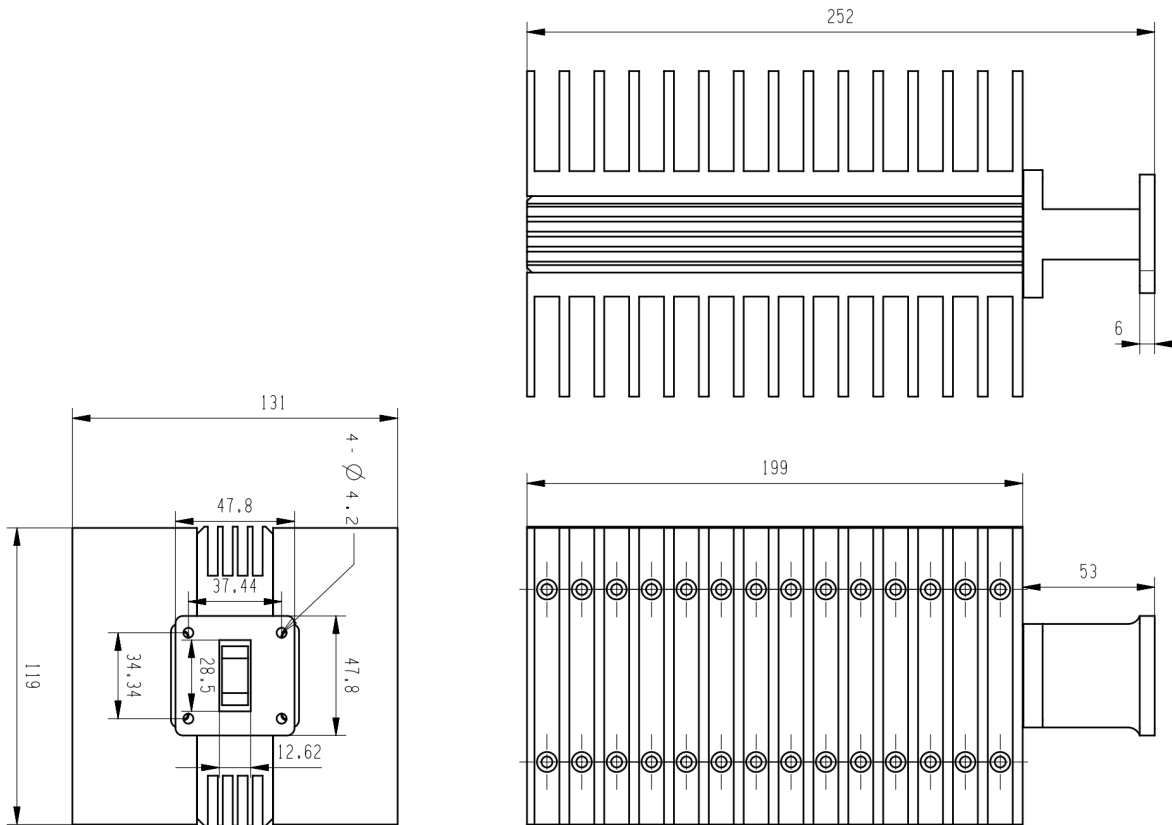



Typical Test Data

