



**Electrical**

<b>Impedance</b>	50 ohm					
<b>Frequency Range</b>	DC-6 GHz					
<b>VSWR</b>	1.25 max					
<b>Input Avg Power</b>	100W@ 25°C ambient, derating linearly to 10W at 100°C					
<b>Peak Power</b>	5kW (5 micro-sec pulse width, 0.5% duty cycle)					
<b>Direction</b>	Bidirectional, N female to N male (other configurations available)					

<b>Attenuation(dB)</b>	3-6	10	20	30	40	50,60
<b>Accuracy(dB)</b>	±0.75	±0.75	±0.75	±1.0	±1.1	±1.1


**Mechanical**

<b>Connector Body</b>	Ternary alloy plated brass
<b>Heat Sink</b>	Black anodized aluminum
<b>Center Contact</b>	Gold plated beryllium copper/brass
<b>Net Weight</b>	About 600 g

**Environmental**

<b>Operating Temperature</b>	-55°C to 100°C
<b>Storage Temperature</b>	-55°C to 125°C
<b>RoHS</b>	Compliant
<b>Temperature Coefficient</b>	<0.0004 dB/dB/°C

**Dimensions(mm)**

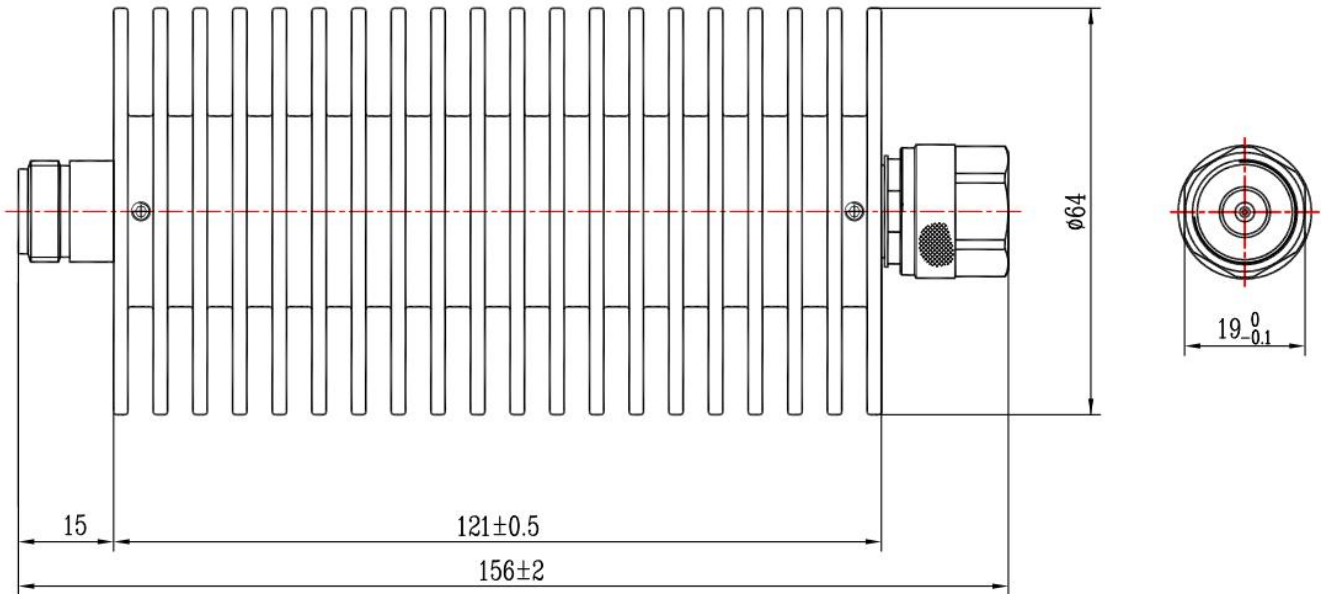

**Notes**

- 1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

**Model Description**

**RFHB06XXNC100**

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:  
A=female for two ends; B=male for two ends  
C=female for one end and male for the other.