

Bias Tee

RT301850A

30kHz-18GHz, SMA, 50 Volts, 700 mA

Rev 1


Electrical & Environmental

Impedance	50 ohm
Frequency Range	30 kHz-18 GHz
VSWR	1.7 max
Insertion Loss	2dB max
Isolation	35dB min
DC Voltage	50 Volts max
DC Current	700 mA max
Average Power	5 Watts max
Operating Temperature	-45°C to +85°C
RoHS	Compliant

Mechanical

Connector	RF Port: SMA Female	RF+DC Port: SMA Female	DC Port: SMA Female
Housing	Aluminum with electric conductive oxidation		
Net Weight	Approx 50g		


Dimensions(mm)

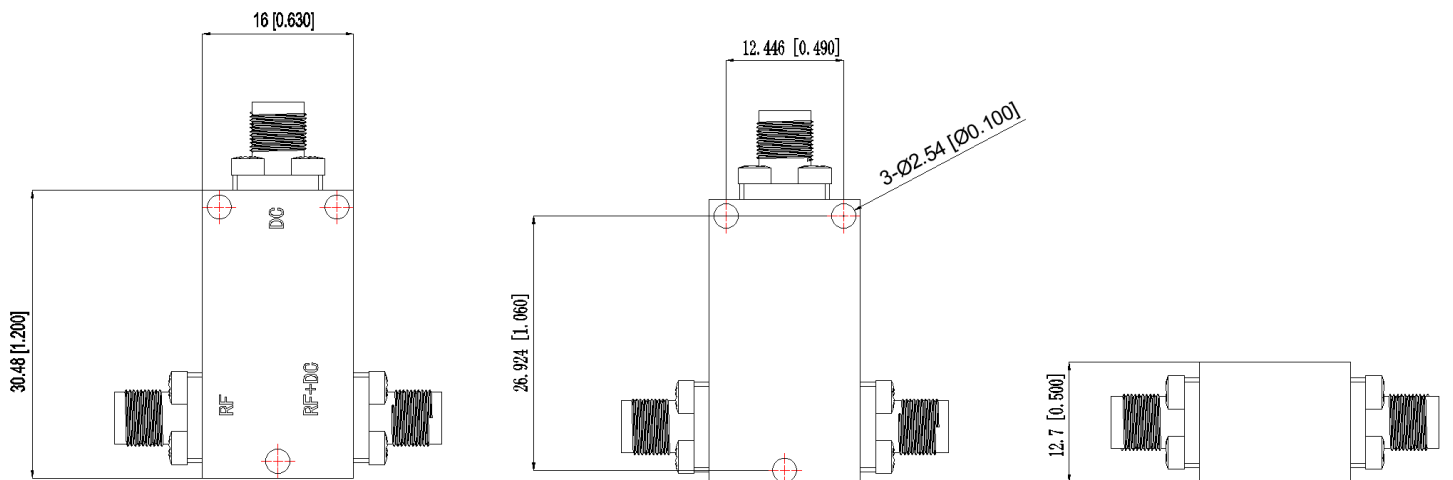

Bias Tee

RT301850A

30kHz-18GHz, SMA, 50 Volts, 700 mA



Rev 1

Typical Test Data

