



Waveguide Termination

WT28A250

WR28, 26.3-40 GHz, 250 Watts, Square Cover Flange

Rev 2



Electrical

Impedance	50 ohm
Frequency Range	26.3-40 GHz
VSWR	1.2 max
Input Avg Power	250 Watts @ 25°C
Peak Power	2.5kWatts
Operating Temperature	-40°C~+70°C

Mechanical

Waveguide Size	WR28(R320)
Flange Type	IEC: UBR320
Waveguide Material	Aluminum
Waveguide Finish	Black painted
Heat Sink Material	Aluminum
Heat Sink Finish	Black painted

Dimensions(mm)

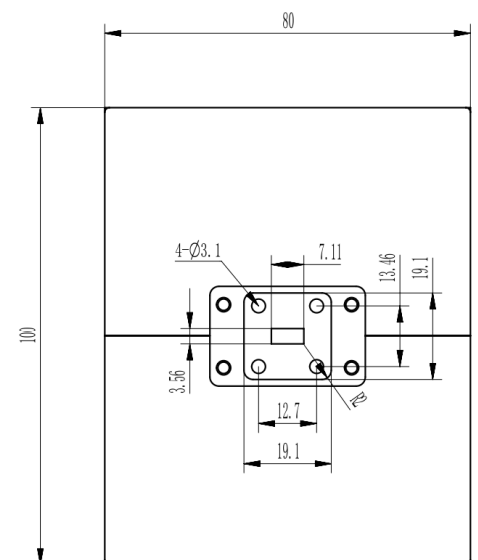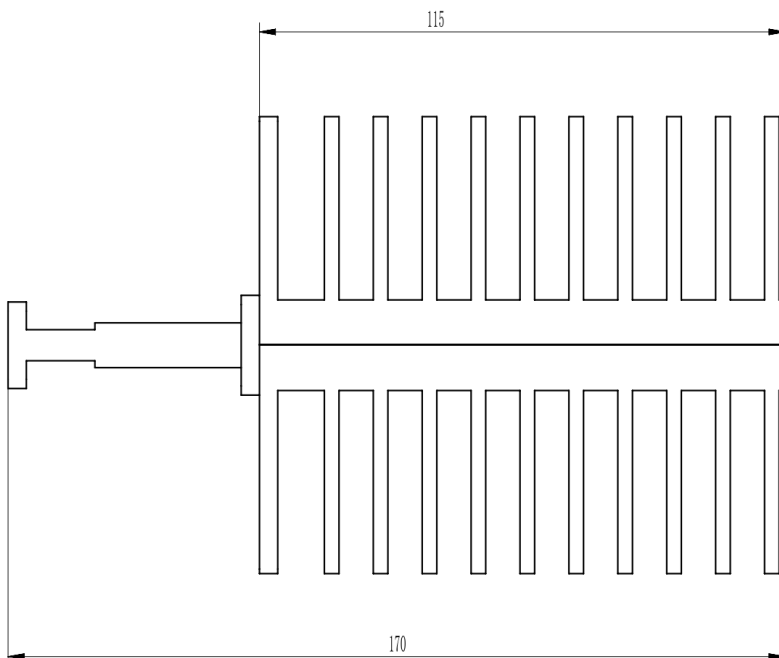



Typical Test Data

